

OUTDOOR LIGHTING

Aldous

Cylindrical LED pathway bollard light, warm 3000K

A minimalist bollard that lines the path with a soft, warm glow.



SPECIFICATIONS

PRODUCT TYPE	Outdoor Lighting
HEIGHT	6 heights — 31 / 59 / 79 / 98 / 118 / 138 in
MATERIALS & FINISH	Die-cast aluminum with a frosted PC diffuser
LIGHT SOURCE	Integrated LED, 3000K warm white
COLOR TEMPERATURE	Warm white 3000K
WEATHER RATING	IP65 waterproof, outdoor
INSTALLATION	Ground-mounted, hardwired — electrician recommended
WARRANTY	1-year limited warranty
IN THE BOX	Arrives with base plate and mounting hardware
FINISH	matte black; white diffuser
RATING	IP65 waterproof, outdoor
VOLTAGE	110–220V

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


HEIGHT	OPTION
31", 59", 79", 98", 118", 138"	9 options, listed under Ordering information

KEY FEATURES

- Warm, even glow — a frosted PC diffuser spreads soft warm-white 3000K light for a welcoming ambiance
- **Die-cast aluminum body.** rust- and corrosion-resistant, in a matte black finish
- **Six heights.** from a 31 in path bollard to a 138 in landscape post
- **Minimalist cylinder form.** clean vertical lines that blend into modern landscapes
- IP65 waterproof — rated against rain, snow and dust for year-round outdoor use
- **Ground-mounted.** anchors securely to pathways, borders and driveways

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

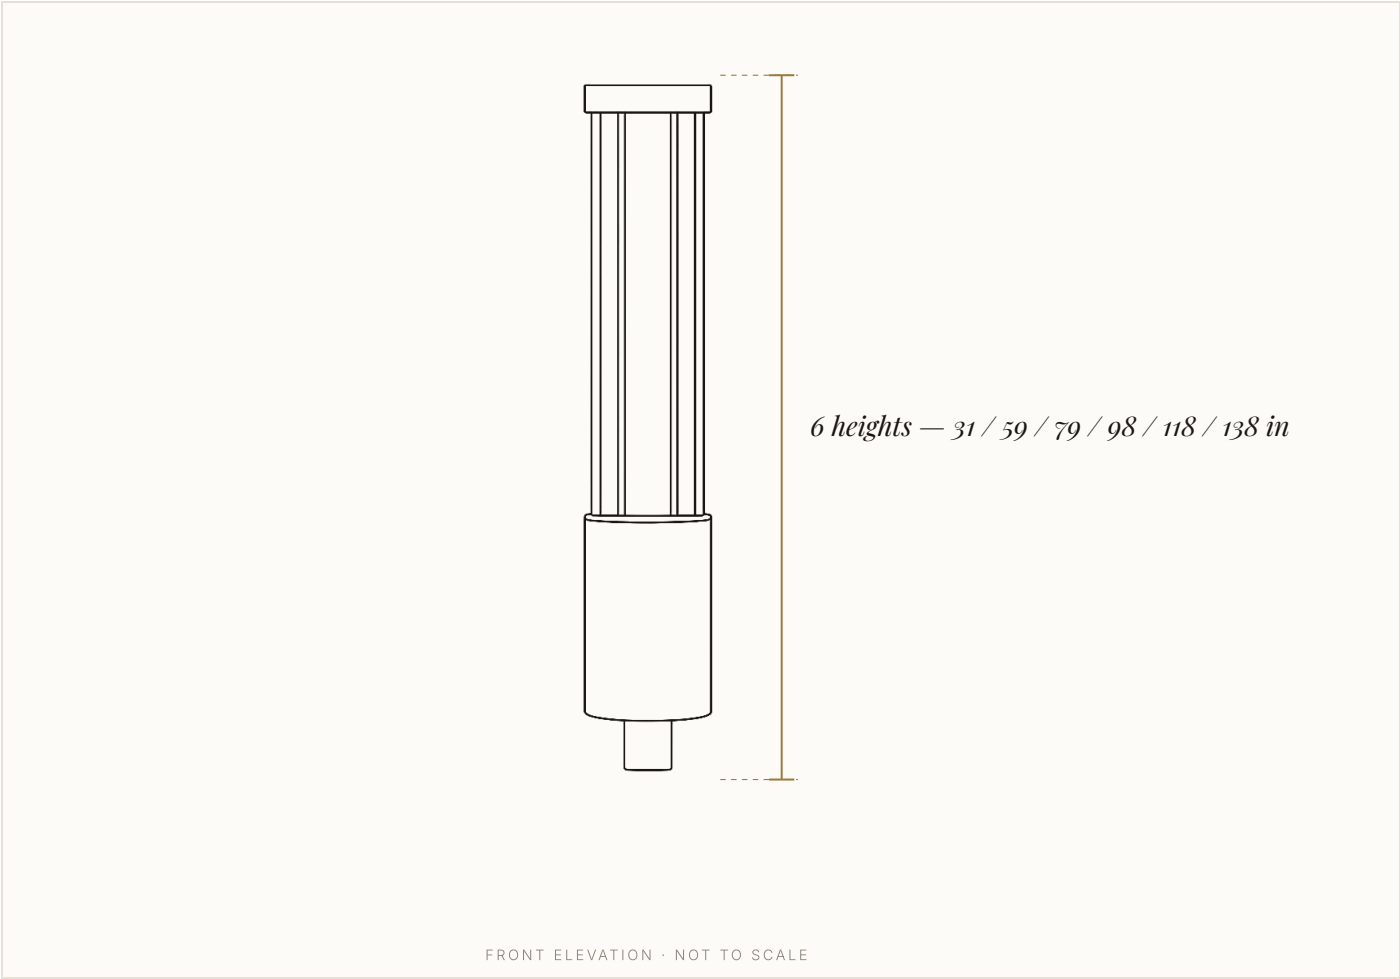

AVAILABLE SIZES

SIZE	HEIGHT
Standard	6 heights — 31 / 59 / 79 / 98 / 118 / 138 in

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixο	
FIXTURE Aldous · Outdoor Lighting	
DRAWING NO. TX-OL-72128-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Aldous currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

HEIGHT	OPTION	CATALOGUE NO.
31"	1 Pc	TX-OL-72128-01
31"	Set of 2	TX-OL-72128-02
31"	Set of 4	TX-OL-72128-03
31"	Set of 6	TX-OL-72128-04
31"	Set of 8	TX-OL-72128-05
31"	Set of 10	TX-OL-72128-06
31"	Set of 15	TX-OL-72128-07
31"	Set of 20	TX-OL-72128-08
31"	Set of 30	TX-OL-72128-09
59"	1 Pc	TX-OL-72128-10
59"	Set of 2	TX-OL-72128-11
59"	Set of 4	TX-OL-72128-12
59"	Set of 6	TX-OL-72128-13
59"	Set of 8	TX-OL-72128-14
59"	Set of 10	TX-OL-72128-15
59"	Set of 15	TX-OL-72128-16
59"	Set of 20	TX-OL-72128-17
59"	Set of 30	TX-OL-72128-18
79"	1 Pc	TX-OL-72128-19
79"	Set of 10	TX-OL-72128-20
79"	Set of 15	TX-OL-72128-21
79"	Set of 20	TX-OL-72128-22
79"	Set of 30	TX-OL-72128-23
98"	1 Pc	TX-OL-72128-24
98"	Set of 10	TX-OL-72128-25
98"	Set of 15	TX-OL-72128-26
98"	Set of 20	TX-OL-72128-27
98"	Set of 30	TX-OL-72128-28
118"	1 Pc	TX-OL-72128-29
118"	Set of 10	TX-OL-72128-30
118"	Set of 15	TX-OL-72128-31
118"	Set of 20	TX-OL-72128-32
118"	Set of 30	TX-OL-72128-33
138"	1 Pc	TX-OL-72128-34

HEIGHT	OPTION	CATALOGUE NO.
138"	Set of 10	TX-OL-72128-35
138"	Set of 15	TX-OL-72128-36
138"	Set of 20	TX-OL-72128-37
138"	Set of 30	TX-OL-72128-38

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	110–220V
LIGHT SOURCE	Integrated LED, 3000K warm white
COLOR TEMPERATURE	Warm white 3000K
RATING	IP65 waterproof, outdoor
INSTALLATION	Ground-mounted, hardwired — electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Run cable to the fixture location in conduit or direct-burial cable as your local code requires, and mount the fixture on its base or stake.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ GFCI-protected outdoor circuit
- ☐ Cable route planned (conduit or direct-burial)
- ☐ Supply voltage confirmed for your region
- ☐ Utility lines located before digging (call 811 in the US)
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

SPACING

Space path lights every 6–8 ft (1.8–2.4 m), staggered on both sides for a natural rhythm.

SETBACK

Set them 6–12 in (15–30 cm) back from the edge of the path or bed.

AIMING

Aim spotlights from the ground up into foliage or walls, away from neighbours' windows.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.