

OUTDOOR LIGHTING

Aveline

Waterproof linear up/down outdoor wall light

A sleek aluminum wall light that washes warm light up and down your facade.



SPECIFICATIONS

PRODUCT TYPE	Outdoor Lighting
WIDTH	7.9 / 11.8 / 19.7 / 31.5 in long, slim profile
HEIGHT	4 lengths — 7.9 / 11.8 / 19.7 / 31.5 in
MATERIALS & FINISH	Die-cast aluminum with an acrylic diffuser
LIGHT SOURCE	Integrated LED, up-and-down wall wash
COLOR TEMPERATURE	Warm white or cool white
WEATHER RATING	IP65 waterproof, outdoor
INSTALLATION	Wall-mounted, hardwired — electrician recommended
WARRANTY	1-year limited warranty
IN THE BOX	Arrives with mounting plate and hardware
FINISH	matte charcoal black
RATING	IP65 waterproof, outdoor
VOLTAGE	110–265V

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

LENGTH
7.9", 11.8", 19.7", 31.5"

COLOR TEMPERATURE
Warm White, White


OPTION
1 Pc, Set of 2, Set of 4, Set of 6, Set of 8

KEY FEATURES

- **Even up/down wall wash.** an acrylic diffuser spreads a soft, uniform linear glow
- **IP65 waterproof** — rated for heavy rain and dust, made for exterior use
- **Two color temperatures.** warm white for ambiance or cool white for bright light
- **Die-cast aluminum body.** durable, weather-ready, in a matte charcoal-black finish
- **Four lengths.** 7.9 / 11.8 / 19.7 / 31.5 in to match any wall
- **Minimalist modern form.** blends cleanly into facades, entries and walls

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

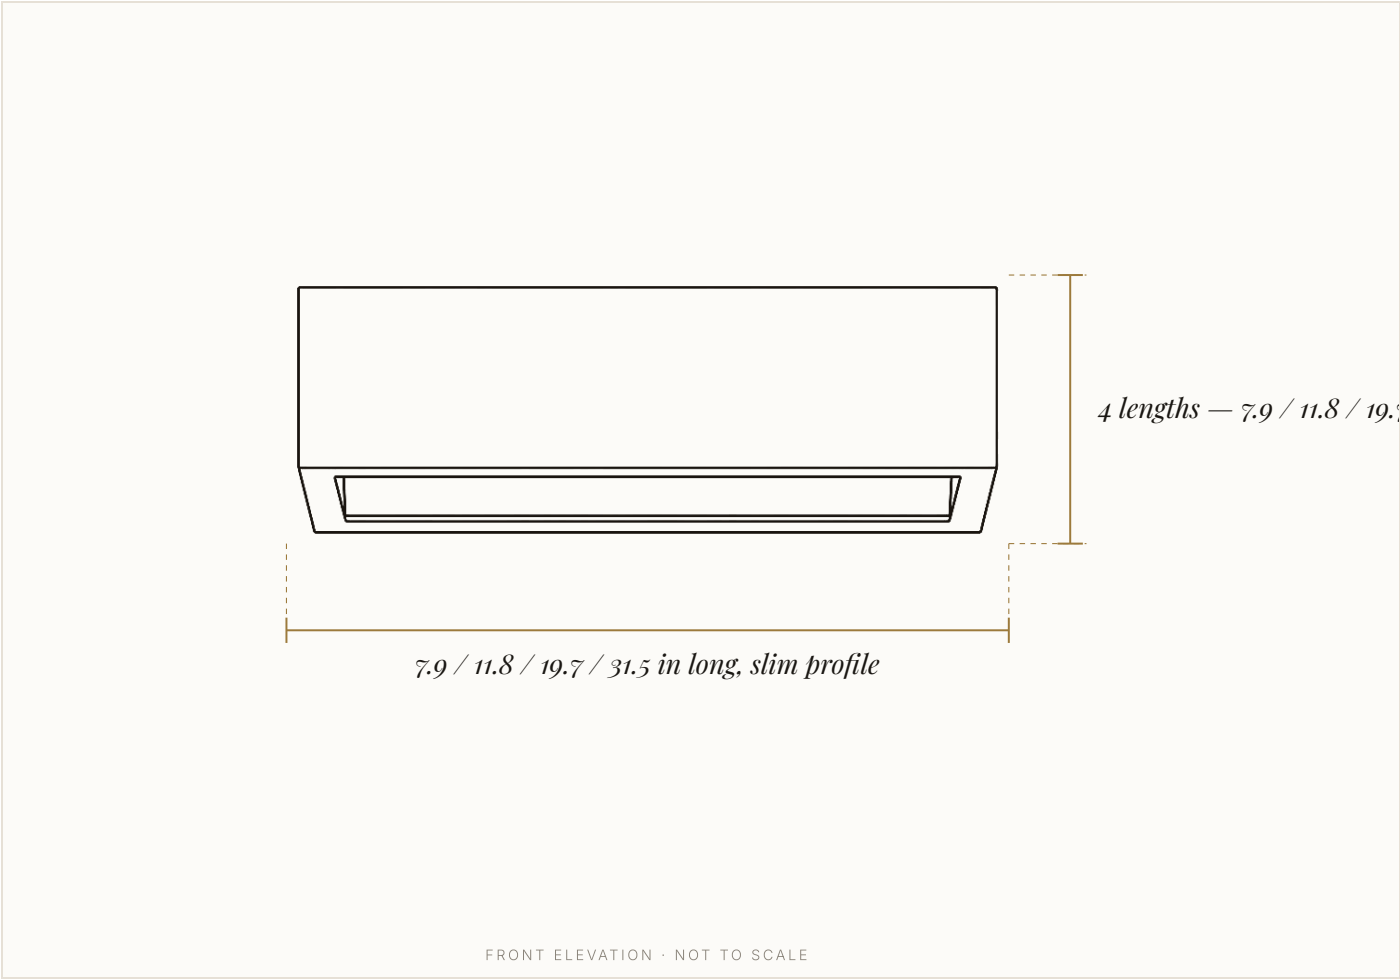

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Standard	7.9 / 11.8 / 19.7 / 31.5 in long, slim profile	4 lengths — 7.9 / 11.8 / 19.7 / 31.5 in

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Aveline · Outdoor Lighting	
DRAWING NO. TX-OW-81248-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Aveline currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

LENGTH	COLOR TEMPERATURE	OPTION	CATALOGUE NO.
7.9"	Warm White	1 Pc	TX-OW-81248-01
7.9"	Warm White	Set of 2	TX-OW-81248-02
7.9"	Warm White	Set of 4	TX-OW-81248-03
7.9"	Warm White	Set of 6	TX-OW-81248-04
7.9"	Warm White	Set of 8	TX-OW-81248-05
7.9"	White	1 Pc	TX-OW-81248-06
7.9"	White	Set of 2	TX-OW-81248-07
7.9"	White	Set of 4	TX-OW-81248-08
7.9"	White	Set of 6	TX-OW-81248-09
7.9"	White	Set of 8	TX-OW-81248-10
11.8"	Warm White	1 Pc	TX-OW-81248-11
11.8"	Warm White	Set of 2	TX-OW-81248-12
11.8"	Warm White	Set of 4	TX-OW-81248-13
11.8"	Warm White	Set of 6	TX-OW-81248-14
11.8"	Warm White	Set of 8	TX-OW-81248-15
11.8"	White	1 Pc	TX-OW-81248-16
11.8"	White	Set of 2	TX-OW-81248-17
11.8"	White	Set of 4	TX-OW-81248-18
11.8"	White	Set of 6	TX-OW-81248-19
11.8"	White	Set of 8	TX-OW-81248-20
19.7"	Warm White	1 Pc	TX-OW-81248-21
19.7"	Warm White	Set of 2	TX-OW-81248-22
19.7"	Warm White	Set of 4	TX-OW-81248-23
19.7"	Warm White	Set of 6	TX-OW-81248-24
19.7"	Warm White	Set of 8	TX-OW-81248-25
19.7"	White	1 Pc	TX-OW-81248-26
19.7"	White	Set of 2	TX-OW-81248-27
19.7"	White	Set of 4	TX-OW-81248-28
19.7"	White	Set of 6	TX-OW-81248-29
19.7"	White	Set of 8	TX-OW-81248-30
31.5"	Warm White	1 Pc	TX-OW-81248-31
31.5"	Warm White	Set of 2	TX-OW-81248-32
31.5"	Warm White	Set of 4	TX-OW-81248-33
31.5"	Warm White	Set of 6	TX-OW-81248-34

LENGTH	COLOR TEMPERATURE	OPTION	CATALOGUE NO.
31.5"	Warm White	Set of 8	TX-OW-81248-35
31.5"	White	1 Pc	TX-OW-81248-36
31.5"	White	Set of 2	TX-OW-81248-37
31.5"	White	Set of 4	TX-OW-81248-38
31.5"	White	Set of 6	TX-OW-81248-39
31.5"	White	Set of 8	TX-OW-81248-40

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	110–265V
LIGHT SOURCE	Integrated LED, up-and-down wall wash
COLOR TEMPERATURE	Warm white or cool white
RATING	IP65 waterproof, outdoor
INSTALLATION	Wall-mounted, hardwired — electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR
Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING
Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER
Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.