

OUTDOOR WALL LIGHTS

Lira



SPECIFICATIONS

PRODUCT TYPE	Outdoor Wall Lights
WIDTH	4.3 in / 11 cm
HEIGHT	11.8 – 59 in / 30 – 150 cm (by size)
LIGHT SOURCE	LED strip
COLOR TEMPERATURE	Warm, neutral, cool or 3-color modes
WEATHER RATING	Waterproof
INSTALLATION	Exterior wall mount
FINISH	Sleek black finish for contemporary home exteriors

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


SIZE	COLOR TEMPERATURE
7 options, listed under Ordering information	Cool White, Warm White, Neutral White, 3 Color Modes
PACK SIZE	
Single, 2-Pack, 4-Pack	

KEY FEATURES

- **Design.** Modern long strip wall light with a slim minimalist profile
 - **Lighting Options.** Choose warm white, neutral white, cool white, or 3-color modes
- **Outdoor Ready.** Waterproof construction for exterior wall installation
 - **Ideal For.** Porches, front doors, patios, garages, garden walls, balconies, corridors, and outdoor entryways

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

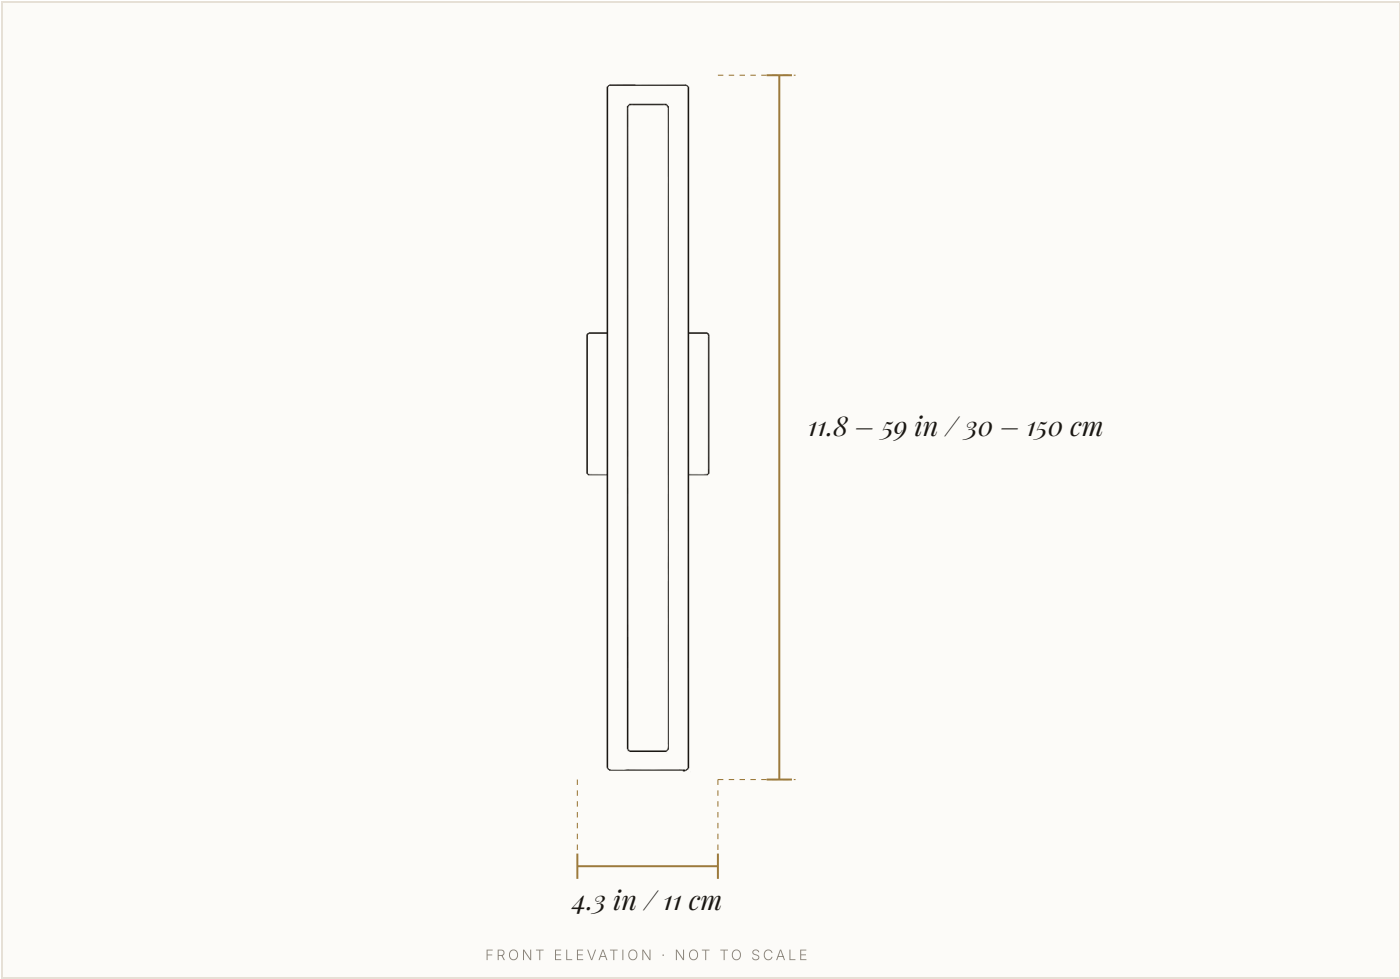

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
By size	4.3 in / 11 cm	11.8 – 59 in / 30 – 150 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Lira · Outdoor Wall Lights	
DRAWING NO. TX-OW-71648-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Lira currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	COLOR TEMPERATURE	PACK SIZE	CATALOGUE NO.
11.81	Cool White	Single	TX-OW-71648-01
11.81	Warm White	Single	TX-OW-71648-02
11.81	Neutral White	Single	TX-OW-71648-03
11.81	3 Color Modes	Single	TX-OW-71648-04
15.75	Cool White	Single	TX-OW-71648-05
15.75	Warm White	Single	TX-OW-71648-06
15.75	Neutral White	Single	TX-OW-71648-07
15.75	3 Color Modes	Single	TX-OW-71648-08
23.62	Cool White	Single	TX-OW-71648-09
23.62	Warm White	Single	TX-OW-71648-10
23.62	Neutral White	Single	TX-OW-71648-11
23.62	3 Color Modes	Single	TX-OW-71648-12
31.5	Cool White	Single	TX-OW-71648-13
31.5	Warm White	Single	TX-OW-71648-14
31.5	Neutral White	Single	TX-OW-71648-15
31.5	3 Color Modes	Single	TX-OW-71648-16
39.37	Cool White	Single	TX-OW-71648-17
39.37	Warm White	Single	TX-OW-71648-18
39.37	Neutral White	Single	TX-OW-71648-19
39.37	3 Color Modes	Single	TX-OW-71648-20
47.24	Cool White	Single	TX-OW-71648-21
47.24	Warm White	Single	TX-OW-71648-22
47.24	Neutral White	Single	TX-OW-71648-23
47.24	3 Color Modes	Single	TX-OW-71648-24
59.06	Cool White	Single	TX-OW-71648-25
59.06	Warm White	Single	TX-OW-71648-26
59.06	Neutral White	Single	TX-OW-71648-27
59.06	3 Color Modes	Single	TX-OW-71648-28
11.81	Cool White	2-Pack	TX-OW-71648-29
11.81	Warm White	2-Pack	TX-OW-71648-30
11.81	Neutral White	2-Pack	TX-OW-71648-31
11.81	3 Color Modes	2-Pack	TX-OW-71648-32
15.75	Cool White	2-Pack	TX-OW-71648-33
15.75	Warm White	2-Pack	TX-OW-71648-34

SIZE	COLOR TEMPERATURE	PACK SIZE	CATALOGUE NO.
15.75	Neutral White	2-Pack	TX-OW-71648-35
15.75	3 Color Modes	2-Pack	TX-OW-71648-36
23.62	Cool White	2-Pack	TX-OW-71648-37
23.62	Warm White	2-Pack	TX-OW-71648-38
23.62	Neutral White	2-Pack	TX-OW-71648-39
23.62	3 Color Modes	2-Pack	TX-OW-71648-40
31.5	Cool White	2-Pack	TX-OW-71648-41
31.5	Warm White	2-Pack	TX-OW-71648-42
31.5	Neutral White	2-Pack	TX-OW-71648-43
31.5	3 Color Modes	2-Pack	TX-OW-71648-44
39.37	Cool White	2-Pack	TX-OW-71648-45
39.37	Warm White	2-Pack	TX-OW-71648-46
39.37	Neutral White	2-Pack	TX-OW-71648-47
39.37	3 Color Modes	2-Pack	TX-OW-71648-48
47.24	Cool White	2-Pack	TX-OW-71648-49
47.24	Warm White	2-Pack	TX-OW-71648-50
47.24	Neutral White	2-Pack	TX-OW-71648-51
47.24	3 Color Modes	2-Pack	TX-OW-71648-52
59.06	Cool White	2-Pack	TX-OW-71648-53
59.06	Warm White	2-Pack	TX-OW-71648-54
59.06	Neutral White	2-Pack	TX-OW-71648-55
59.06	3 Color Modes	2-Pack	TX-OW-71648-56
11.81	Cool White	4-Pack	TX-OW-71648-57
11.81	Warm White	4-Pack	TX-OW-71648-58
11.81	Neutral White	4-Pack	TX-OW-71648-59
11.81	3 Color Modes	4-Pack	TX-OW-71648-60
15.75	Cool White	4-Pack	TX-OW-71648-61
15.75	Warm White	4-Pack	TX-OW-71648-62
15.75	Neutral White	4-Pack	TX-OW-71648-63
15.75	3 Color Modes	4-Pack	TX-OW-71648-64
23.62	Cool White	4-Pack	TX-OW-71648-65
23.62	Warm White	4-Pack	TX-OW-71648-66
23.62	Neutral White	4-Pack	TX-OW-71648-67
23.62	3 Color Modes	4-Pack	TX-OW-71648-68

Ordering information, continued

SIZE	COLOR TEMPERATURE	PACK SIZE	CATALOGUE NO.
31.5	Cool White	4-Pack	TX-OW-71648-69
31.5	Warm White	4-Pack	TX-OW-71648-70
31.5	Neutral White	4-Pack	TX-OW-71648-71
31.5	3 Color Modes	4-Pack	TX-OW-71648-72
39.37	Cool White	4-Pack	TX-OW-71648-73
39.37	Warm White	4-Pack	TX-OW-71648-74
39.37	Neutral White	4-Pack	TX-OW-71648-75
39.37	3 Color Modes	4-Pack	TX-OW-71648-76
47.24	Cool White	4-Pack	TX-OW-71648-77
47.24	Warm White	4-Pack	TX-OW-71648-78
47.24	Neutral White	4-Pack	TX-OW-71648-79
47.24	3 Color Modes	4-Pack	TX-OW-71648-80
59.06	Cool White	4-Pack	TX-OW-71648-81
59.06	Warm White	4-Pack	TX-OW-71648-82
59.06	Neutral White	4-Pack	TX-OW-71648-83
59.06	3 Color Modes	4-Pack	TX-OW-71648-84

For your electrician

ELECTRICAL

LIGHT SOURCE	LED strip
COLOR TEMPERATURE	Warm, neutral, cool or 3-color modes
RATING	Waterproof
INSTALLATION	Exterior wall mount

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR
Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING
Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER
Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiix.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.