

CHANDELIERS

Luce

Firefly sputnik LED chandelier

Dozens of tiny glass leaves on branching arms, glowing like a cloud of fireflies above the table.



SPECIFICATIONS

PRODUCT TYPE	Chandeliers
WIDTH	Ø 27.6 in / 70 cm (30 lights) · Ø 32.7 in / 83 cm (45 lights) · Ø 35.8 in / 91 cm (54 lights) · Ø 40.6 in / 103 cm (63 lights)
HEIGHT	13.8 in / 35 cm (30 lights) · 13.8 in / 35 cm (45 lights) · 13.8 in / 35 cm (54 lights) · 13.8 in / 35 cm (63 lights), plus a 7.9 + 11.8 in rod
MATERIALS & FINISH	Metal and iron frame with translucent glass leaf shades
LIGHT SOURCE	G4 bi-pin bulbs, about 2W each (included with the dimmable version)
COLOR TEMPERATURE	Warm 2700–3000K recommended
DIMMING	Triac dimmable version available
VOLTAGE	AC 110–240V
INSTALLATION	Hardwired ceiling mount on a rod, sloped ceilings up to 30°; licensed electrician recommended
WEIGHT	about 4.8 lb to 13.2 lb by size

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


SIZE	FINISH
30 lights · Ø 27.6 in, 45 lights · Ø 32.7 in, 54 lights · Ø 35.8 in, 63 lights · Ø 40.6 in	Gold, Black
DIMMING	
Standard, Dimmable (Triac)	

KEY FEATURES

- **Glass leaf shades.** translucent glass leaves catch and scatter the light
- **Two finishes.** gold or black arms with white glass
- **Sloped-ceiling ready.** suits slopes up to 30° with a swivel mount
- **Four sizes.** 30, 45, 54 or 63 lights, from Ø 27.6 in to 40.6 in
- **Dimmable option.** the Triac dimmable version includes dimmable bulbs
- **Single leaf.** Ø 2.4 × H 3.5 in; about 2W per light

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

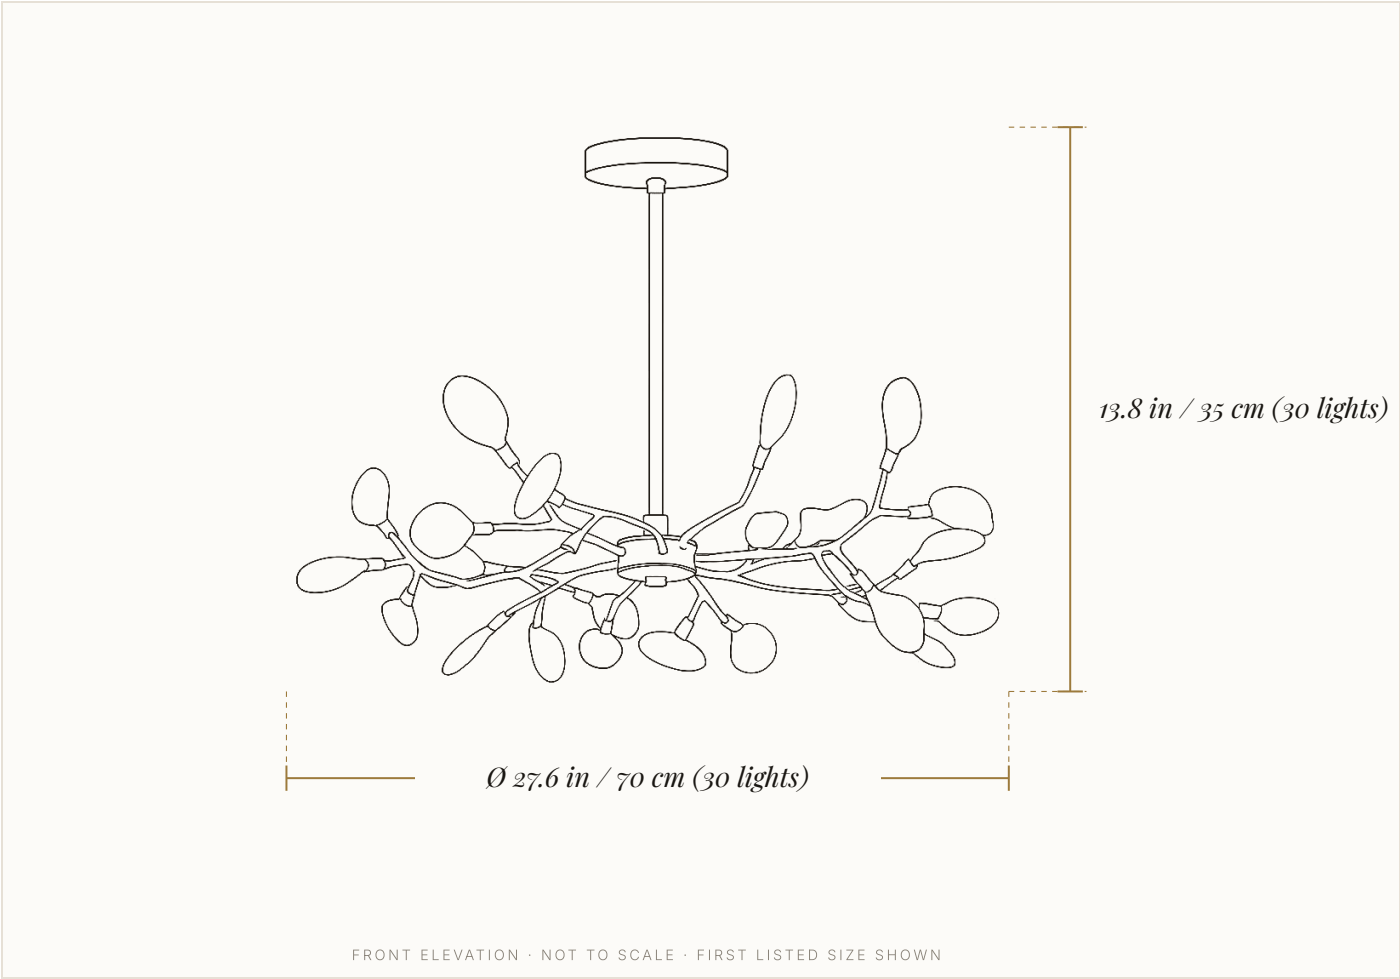

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
30 lights · Ø 27.6 in	Ø 27.6 in / 70 cm (30 lights)	13.8 in / 35 cm (30 lights)
45 lights · Ø 32.7 in	Ø 32.7 in / 83 cm (45 lights)	13.8 in / 35 cm (45 lights)
54 lights · Ø 35.8 in	Ø 35.8 in / 91 cm (54 lights)	13.8 in / 35 cm (54 lights)
63 lights · Ø 40.6 in	Ø 40.6 in / 103 cm (63 lights)	13.8 in / 35 cm (63 lights), plus a 7.9 + 11.8 in rod

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixø

FIXTURE
Luce · Chandeliers

DRAWING NO.
TX-CH-95232-D1

VIEW
Front elevation

SCALE
Not to scale

UNITS
in / cm

ISSUED
13 Oct 2026

REVISION
A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Luce currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	FINISH	DIMMING	CATALOGUE NO.
30 lights · Ø 27.6 in	Gold	Standard	TX-CH-95232-01
30 lights · Ø 27.6 in	Gold	Dimmable (Triac)	TX-CH-95232-02
30 lights · Ø 27.6 in	Black	Standard	TX-CH-95232-03
30 lights · Ø 27.6 in	Black	Dimmable (Triac)	TX-CH-95232-04
45 lights · Ø 32.7 in	Gold	Standard	TX-CH-95232-05
45 lights · Ø 32.7 in	Gold	Dimmable (Triac)	TX-CH-95232-06
45 lights · Ø 32.7 in	Black	Standard	TX-CH-95232-07
45 lights · Ø 32.7 in	Black	Dimmable (Triac)	TX-CH-95232-08
54 lights · Ø 35.8 in	Gold	Standard	TX-CH-95232-09
54 lights · Ø 35.8 in	Gold	Dimmable (Triac)	TX-CH-95232-10
54 lights · Ø 35.8 in	Black	Standard	TX-CH-95232-11
54 lights · Ø 35.8 in	Black	Dimmable (Triac)	TX-CH-95232-12
63 lights · Ø 40.6 in	Gold	Standard	TX-CH-95232-13
63 lights · Ø 40.6 in	Gold	Dimmable (Triac)	TX-CH-95232-14
63 lights · Ø 40.6 in	Black	Standard	TX-CH-95232-15
63 lights · Ø 40.6 in	Black	Dimmable (Triac)	TX-CH-95232-16

SPECIFICATION NOTES

SIZES	30 lights Ø 27.6 × H 13.8 in (about 4.8 lb) · 45 lights Ø 32.7 × H 13.8 in (about 7.7 lb) · 54 lights Ø 35.8 × H 13.8 in (about 10.6 lb) · 63 lights Ø 40.6 × H 13.8 in (about 13.2 lb)
-------	---

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	AC 110–240V
LIGHT SOURCE	G4 bi-pin bulbs, about 2W each (included with the dimmable version)
COLOR TEMPERATURE	Warm 2700–3000K recommended
DIMMING	Triac dimmable version available
INSTALLATION	Hardwired ceiling mount on a rod, sloped ceilings up to 30°; licensed electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

OVER A TABLE

Hang the bottom of the fixture 30–36 in (76–91 cm) above the tabletop; choose a width about one-half to two-thirds of the table.

OVER AN ISLAND

Space multiple pendants 24–30 in (61–76 cm) apart, 30–36 in above the counter.

OPEN AREAS

In halls and living spaces keep at least 84 in (7 ft / 213 cm) clear underneath; add about 3 in of drop per foot of ceiling above 8 ft.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.

Returns. 30 days from delivery, no restocking fee.