

OUTDOOR WALL LIGHTS

Marlow

Up/down LED wall sconce, aluminium + gold reflector

A curved wash of warm light, up and down the wall.



SPECIFICATIONS

PRODUCT TYPE	Outdoor Wall Lights
WIDTH	2.8–5.9 in (7–15 cm)
HEIGHT	5.9–15.7 in (15–40 cm)
MATERIALS & FINISH	Matte metal, brushed-gold reflector
LIGHT SOURCE	Integrated LED, dual-directional
COLOR TEMPERATURE	Warm white 3000K
VOLTAGE	85–265V
WEATHER RATING	Weather-rated, covered outdoor
INSTALLATION	Wall mount, up/down wash
WARRANTY	2-year warranty
IN THE BOX	Single carton, approx. 8 × 8 × 18 in

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.


OPTIONS

COLOR	SIZE
Black/Gold, White/Gold, Black, White	2.8"x2.8"x5.9", 3.2"x3.2"x7.9", 4.7"x4.7"x11.8", 5.9"x5.9"x15.7", 3.2"x3.2"x7.9"(Motion Sensing)

SETS
2 PCS, 4 PCS, 6 PCS, 8 PCS

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

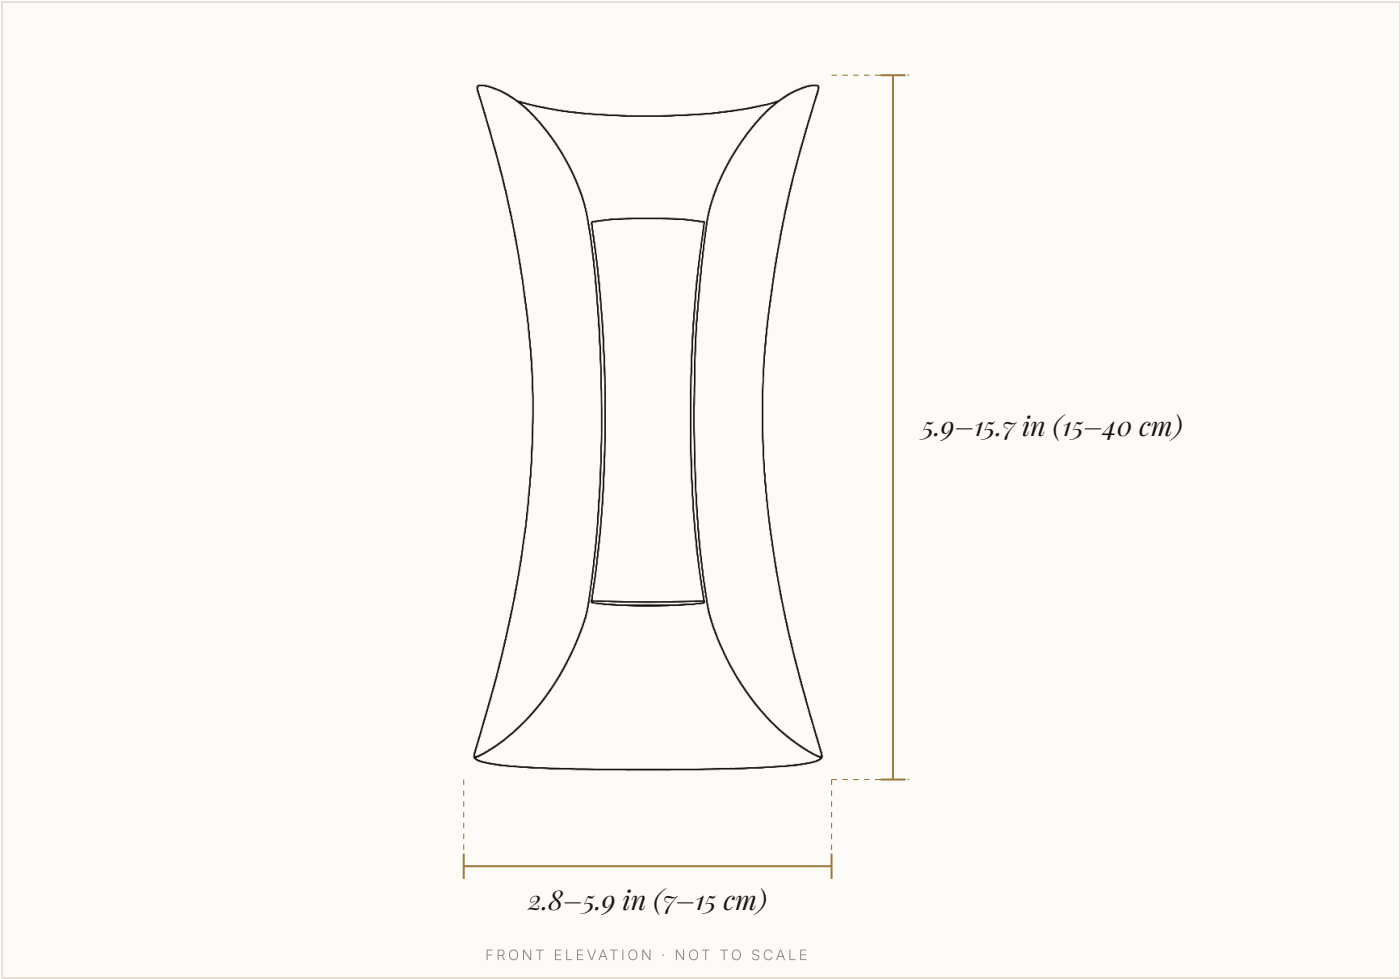

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Standard	2.8–5.9 in (7–15 cm)	5.9–15.7 in (15–40 cm)

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo

FIXTURE Marlow · Outdoor Wall Lights	
DRAWING NO. TX-OW-62592-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Marlow currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

COLOR	SIZE	SETS	CATALOGUE NO.
Black/Gold	2.8"x2.8"x5.9"	2 PCS	TX-0W-62592-01
Black/Gold	2.8"x2.8"x5.9"	4 PCS	TX-0W-62592-02
Black/Gold	2.8"x2.8"x5.9"	6 PCS	TX-0W-62592-03
Black/Gold	2.8"x2.8"x5.9"	8 PCS	TX-0W-62592-04
Black/Gold	3.2"x3.2"x7.9"	2 PCS	TX-0W-62592-05
Black/Gold	3.2"x3.2"x7.9"	4 PCS	TX-0W-62592-06
Black/Gold	3.2"x3.2"x7.9"	6 PCS	TX-0W-62592-07
Black/Gold	3.2"x3.2"x7.9"	8 PCS	TX-0W-62592-08
Black/Gold	4.7"x4.7"x11.8"	2 PCS	TX-0W-62592-09
Black/Gold	4.7"x4.7"x11.8"	4 PCS	TX-0W-62592-10
Black/Gold	4.7"x4.7"x11.8"	6 PCS	TX-0W-62592-11
Black/Gold	4.7"x4.7"x11.8"	8 PCS	TX-0W-62592-12
Black/Gold	5.9"x5.9"x15.7"	2 PCS	TX-0W-62592-13
Black/Gold	5.9"x5.9"x15.7"	4 PCS	TX-0W-62592-14
Black/Gold	5.9"x5.9"x15.7"	6 PCS	TX-0W-62592-15
Black/Gold	5.9"x5.9"x15.7"	8 PCS	TX-0W-62592-16
Black/Gold	3.2"x3.2"x7.9"(Motion Sensing)	2 PCS	TX-0W-62592-17
Black/Gold	3.2"x3.2"x7.9"(Motion Sensing)	4 PCS	TX-0W-62592-18
Black/Gold	3.2"x3.2"x7.9"(Motion Sensing)	6 PCS	TX-0W-62592-19
Black/Gold	3.2"x3.2"x7.9"(Motion Sensing)	8 PCS	TX-0W-62592-20
White/Gold	2.8"x2.8"x5.9"	2 PCS	TX-0W-62592-21
White/Gold	2.8"x2.8"x5.9"	4 PCS	TX-0W-62592-22

COLOR	SIZE	SETS	CATALOGUE NO.
White/Gold	2.8"x2.8"x5.9"	6 PCS	TX-0W-62592-23
White/Gold	2.8"x2.8"x5.9"	8 PCS	TX-0W-62592-24
White/Gold	3.2"x3.2"x7.9"	2 PCS	TX-0W-62592-25
White/Gold	3.2"x3.2"x7.9"	4 PCS	TX-0W-62592-26
White/Gold	3.2"x3.2"x7.9"	6 PCS	TX-0W-62592-27
White/Gold	3.2"x3.2"x7.9"	8 PCS	TX-0W-62592-28
White/Gold	4.7"x4.7"x11.8"	2 PCS	TX-0W-62592-29
White/Gold	4.7"x4.7"x11.8"	4 PCS	TX-0W-62592-30
White/Gold	4.7"x4.7"x11.8"	6 PCS	TX-0W-62592-31
White/Gold	4.7"x4.7"x11.8"	8 PCS	TX-0W-62592-32
White/Gold	5.9"x5.9"x15.7"	2 PCS	TX-0W-62592-33
White/Gold	5.9"x5.9"x15.7"	4 PCS	TX-0W-62592-34
White/Gold	5.9"x5.9"x15.7"	6 PCS	TX-0W-62592-35
White/Gold	5.9"x5.9"x15.7"	8 PCS	TX-0W-62592-36
White/Gold	3.2"x3.2"x7.9"(Motion Sensing)	2 PCS	TX-0W-62592-37
White/Gold	3.2"x3.2"x7.9"(Motion Sensing)	4 PCS	TX-0W-62592-38
White/Gold	3.2"x3.2"x7.9"(Motion Sensing)	6 PCS	TX-0W-62592-39
White/Gold	3.2"x3.2"x7.9"(Motion Sensing)	8 PCS	TX-0W-62592-40
Black	2.8"x2.8"x5.9"	2 PCS	TX-0W-62592-41
Black	2.8"x2.8"x5.9"	4 PCS	TX-0W-62592-42
Black	2.8"x2.8"x5.9"	6 PCS	TX-0W-62592-43
Black	2.8"x2.8"x5.9"	8 PCS	TX-0W-62592-44

Ordering information, continued

COLOR	SIZE	SETS	CATALOGUE NO.
Black	3.2"x3.2"x7.9"	2 PCS	TX-OW-62592-45
Black	3.2"x3.2"x7.9"	4 PCS	TX-OW-62592-46
Black	3.2"x3.2"x7.9"	6 PCS	TX-OW-62592-47
Black	3.2"x3.2"x7.9"	8 PCS	TX-OW-62592-48
Black	4.7"x4.7"x11.8"	2 PCS	TX-OW-62592-49
Black	4.7"x4.7"x11.8"	4 PCS	TX-OW-62592-50
Black	4.7"x4.7"x11.8"	6 PCS	TX-OW-62592-51
Black	4.7"x4.7"x11.8"	8 PCS	TX-OW-62592-52
Black	5.9"x5.9"x15.7"	2 PCS	TX-OW-62592-53
Black	5.9"x5.9"x15.7"	4 PCS	TX-OW-62592-54
Black	5.9"x5.9"x15.7"	6 PCS	TX-OW-62592-55
Black	5.9"x5.9"x15.7"	8 PCS	TX-OW-62592-56
White	2.8"x2.8"x5.9"	2 PCS	TX-OW-62592-57
White	2.8"x2.8"x5.9"	4 PCS	TX-OW-62592-58
White	2.8"x2.8"x5.9"	6 PCS	TX-OW-62592-59
White	2.8"x2.8"x5.9"	8 PCS	TX-OW-62592-60
White	3.2"x3.2"x7.9"	2 PCS	TX-OW-62592-61
White	3.2"x3.2"x7.9"	4 PCS	TX-OW-62592-62
White	3.2"x3.2"x7.9"	6 PCS	TX-OW-62592-63
White	3.2"x3.2"x7.9"	8 PCS	TX-OW-62592-64
White	4.7"x4.7"x11.8"	2 PCS	TX-OW-62592-65
White	4.7"x4.7"x11.8"	4 PCS	TX-OW-62592-66
White	4.7"x4.7"x11.8"	6 PCS	TX-OW-62592-67
White	4.7"x4.7"x11.8"	8 PCS	TX-OW-62592-68
White	5.9"x5.9"x15.7"	2 PCS	TX-OW-62592-69
White	5.9"x5.9"x15.7"	4 PCS	TX-OW-62592-70
White	5.9"x5.9"x15.7"	6 PCS	TX-OW-62592-71
White	5.9"x5.9"x15.7"	8 PCS	TX-OW-62592-72

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	85–265V
LIGHT SOURCE	Integrated LED, dual-directional
COLOR TEMPERATURE	Warm white 3000K
RATING	Weather-rated, covered outdoor
INSTALLATION	Wall mount, up/down wash

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR

Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING

Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER

Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.

Returns. 30 days from delivery, no restocking fee.