

CEILING LIGHT

Mireille

Scalloped fabric semi-flush mount



SPECIFICATIONS

PRODUCT TYPE	Ceiling Light
WIDTH	Ø 15.7 in / 40 cm
HEIGHT	11.8 in / 30 cm
MATERIAL	Iron & fabric
FINISH	Copper frame, creamy shade
INSTALLATION	Hardwired · dimmable

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


FINISH
Copper & Creamy

KEY FEATURES

- **Pleated fabric shade.** hand-gathered creamy fabric in a melon silhouette.
- **Iron frame.** sturdy metal structure with a warm copper finish.
- **Dimmable.** compatible with standard dimmer switches.
- **Scalloped trim rim.** undulating braided edge for couture detail.
- **Semi-flush profile.** ideal for low-clearance ceilings.
- **Bulbs.** Three E26/E27, 40W max (not included)

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

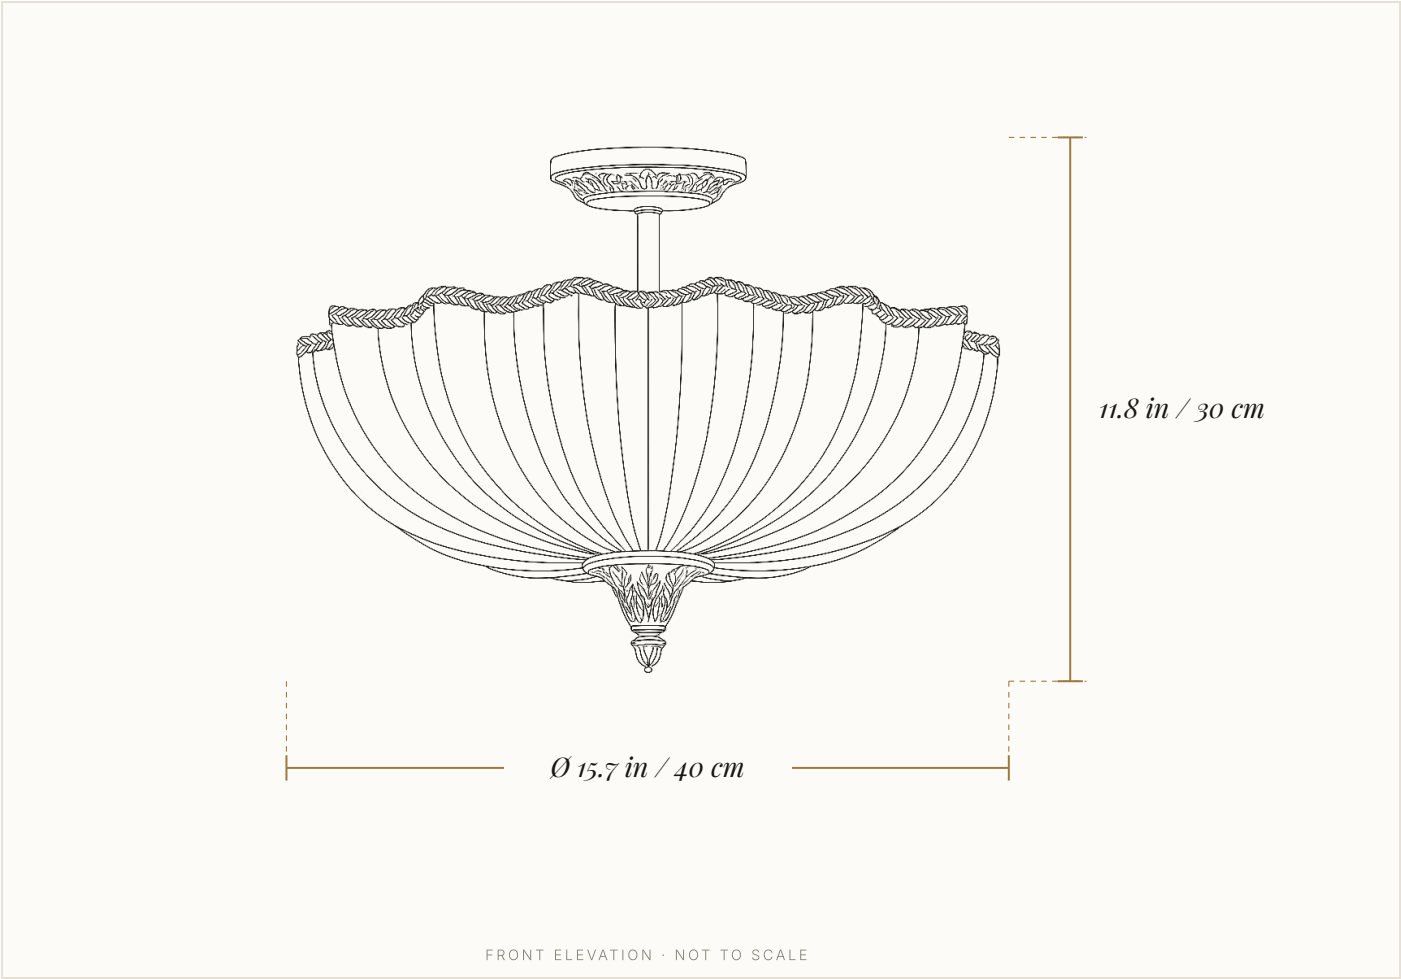

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Standard	Ø 15.7 in / 40 cm	11.8 in / 30 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo

FIXTURE
Mireille · Ceiling Light

DRAWING NO.
TX-CL-22112-D1

VIEW
Front elevation

SCALE
Not to scale

UNITS
in / cm

ISSUED
7 Oct 2026

REVISION
A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Mireille currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

FINISH	CATALOGUE NO.
Copper & Creamy	TX-CL-22112-01

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

INSTALLATION Hardwired · dimmable

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

ROOM SIZE

Add the room's length and width in feet; that number in inches is a good fixture diameter.

CLEARANCE

Keep at least 84 in (7 ft / 213 cm) from the floor to the bottom of the fixture in walkways.

OVER A TABLE

Choose a fixture about one-half to two-thirds of the table width; a flush or semi-flush mount suits ceilings under 8–9 ft.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.

Returns. 30 days from delivery, no restocking fee.