

OUTDOOR WALL LIGHTS

Nyla

Outdoor Motion-Sensor Wall Sconce — Matte Black, IP65, 2700K

Slim waterproof outdoor sconce with optional motion sensor



SPECIFICATIONS

PRODUCT TYPE	Outdoor Wall Lights
WIDTH	12.6 – 31.5 in / 32 – 80 cm (by size)
LIGHT SOURCE	LED — motion or non-motion options
WEATHER RATING	Waterproof
INSTALLATION	Exterior wall mount
STYLE	Modern minimalist black LED wall sconce for exterior walls
LIGHTING	Bright outdoor illumination for entryways, patios, and walkways
SENSOR OPTIONS	Available with motion sensor or no motion sensor configurations
OPTIONS	Multiple lengths and pack sizes for single areas or full-property lighting

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


STYLE	LENGTH
No Motion Sensor, Motion Sensor	12.6, 23.6, 31.5
PACK SIZE	
Single, 2-Pack, 4-Pack, 6-Pack, 8-Pack	

KEY FEATURES

- **Weather Resistance.** Waterproof build for reliable outdoor performance
- **Ideal For.** Front doors, garages, patios, corridors, fences, balconies, and garden walls

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

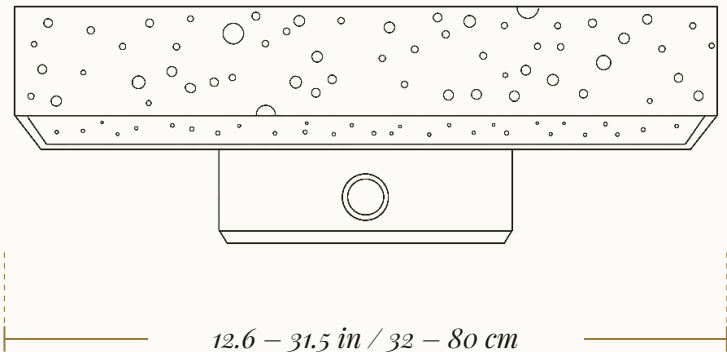

FRONT ELEVATION · NOT TO SCALE

AVAILABLE SIZES

SIZE	WIDTH
By size	12.6 – 31.5 in / 32 – 80 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Nyla · Outdoor Wall Lights	
DRAWING NO. TX-OW-95936-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Nyla currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

STYLE	LENGTH	PACK SIZE	CATALOGUE NO.
No Motion Sensor	12.6	Single	TX-OW-95936-01
No Motion Sensor	12.6	2-Pack	TX-OW-95936-02
No Motion Sensor	12.6	4-Pack	TX-OW-95936-03
No Motion Sensor	12.6	6-Pack	TX-OW-95936-04
No Motion Sensor	12.6	8-Pack	TX-OW-95936-05
No Motion Sensor	23.6	Single	TX-OW-95936-06
No Motion Sensor	23.6	2-Pack	TX-OW-95936-07
No Motion Sensor	23.6	4-Pack	TX-OW-95936-08
No Motion Sensor	23.6	6-Pack	TX-OW-95936-09
No Motion Sensor	23.6	8-Pack	TX-OW-95936-10
No Motion Sensor	31.5	Single	TX-OW-95936-11
No Motion Sensor	31.5	2-Pack	TX-OW-95936-12
No Motion Sensor	31.5	4-Pack	TX-OW-95936-13
No Motion Sensor	31.5	6-Pack	TX-OW-95936-14
No Motion Sensor	31.5	8-Pack	TX-OW-95936-15
Motion Sensor	12.6	Single	TX-OW-95936-16
Motion Sensor	12.6	2-Pack	TX-OW-95936-17
Motion Sensor	12.6	4-Pack	TX-OW-95936-18
Motion Sensor	12.6	6-Pack	TX-OW-95936-19
Motion Sensor	12.6	8-Pack	TX-OW-95936-20
Motion Sensor	23.6	Single	TX-OW-95936-21
Motion Sensor	23.6	2-Pack	TX-OW-95936-22
Motion Sensor	23.6	4-Pack	TX-OW-95936-23
Motion Sensor	23.6	6-Pack	TX-OW-95936-24
Motion Sensor	23.6	8-Pack	TX-OW-95936-25
Motion Sensor	31.5	Single	TX-OW-95936-26
Motion Sensor	31.5	2-Pack	TX-OW-95936-27
Motion Sensor	31.5	4-Pack	TX-OW-95936-28
Motion Sensor	31.5	6-Pack	TX-OW-95936-29
Motion Sensor	31.5	8-Pack	TX-OW-95936-30

For your electrician

ELECTRICAL

LIGHT SOURCE	LED — motion or non-motion options
RATING	Waterproof
INSTALLATION	Exterior wall mount

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR
Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING
Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER
Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiix.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.