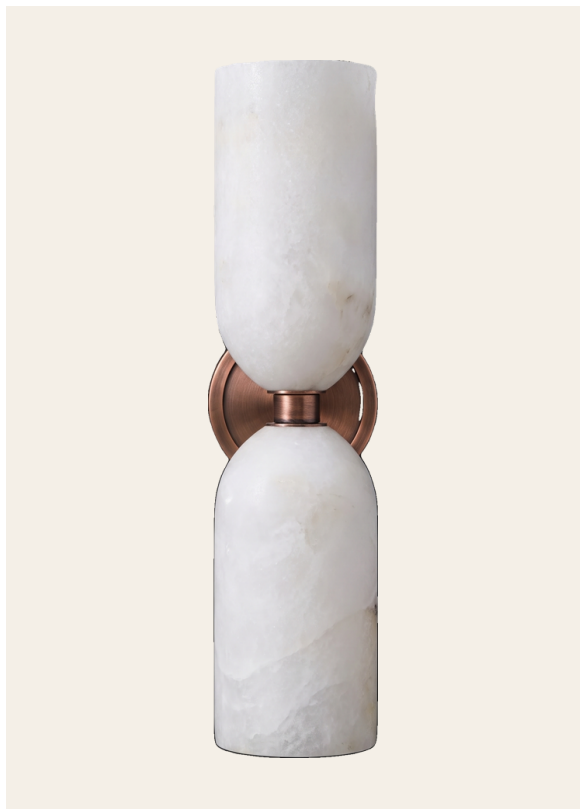


WALL SCONCES

Nyx

Up-and-down twin alabaster wall sconce

Two columns of real alabaster joined by a metal collar, washing soft light up and down the wall.

SPECIFICATIONS

PRODUCT TYPE	Wall Sconces
WIDTH	Ø 3.9 in / 10 cm (Small) · Ø 3.9 in / 10 cm (Large)
HEIGHT	13.4 in / 34 cm (Small) · 20.5 in / 52 cm (Large)
EXTENSION FROM WALL	4.7 in / 12 cm (Small) · 5.9 in / 15 cm (Large) from the wall
MATERIALS & FINISH	Brass and metal framework with genuine Spanish alabaster
LIGHT SOURCE	G9 bulbs (not included)
COLOR TEMPERATURE	Warm 2700–3000K LED recommended
DIMMING	Dimmable with dimmable bulbs and a compatible wall dimmer
VOLTAGE	AC 110–240V
INSTALLATION	Hardwired wall mount, damp rated; licensed electrician recommended
RATING	IP20 damp rated, indoor only

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


SIZE	FINISH
Small · H 13.4 in, Large · H 20.5 in	Copper, Black, Bronze

KEY FEATURES

- **Genuine Spanish alabaster.** natural translucent stone, every piece unique
- **Three finishes.** copper, black or bronze
- **Damp rated.** suits a well-ventilated bathroom beside a mirror (not in a shower)
- **Up and down light.** two shades wash light both ways
- **Two heights.** 13.4 in or 20.5 in
- **Bulbs.** G9 base (not included); dimmable with dimmable bulbs and a compatible dimmer

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

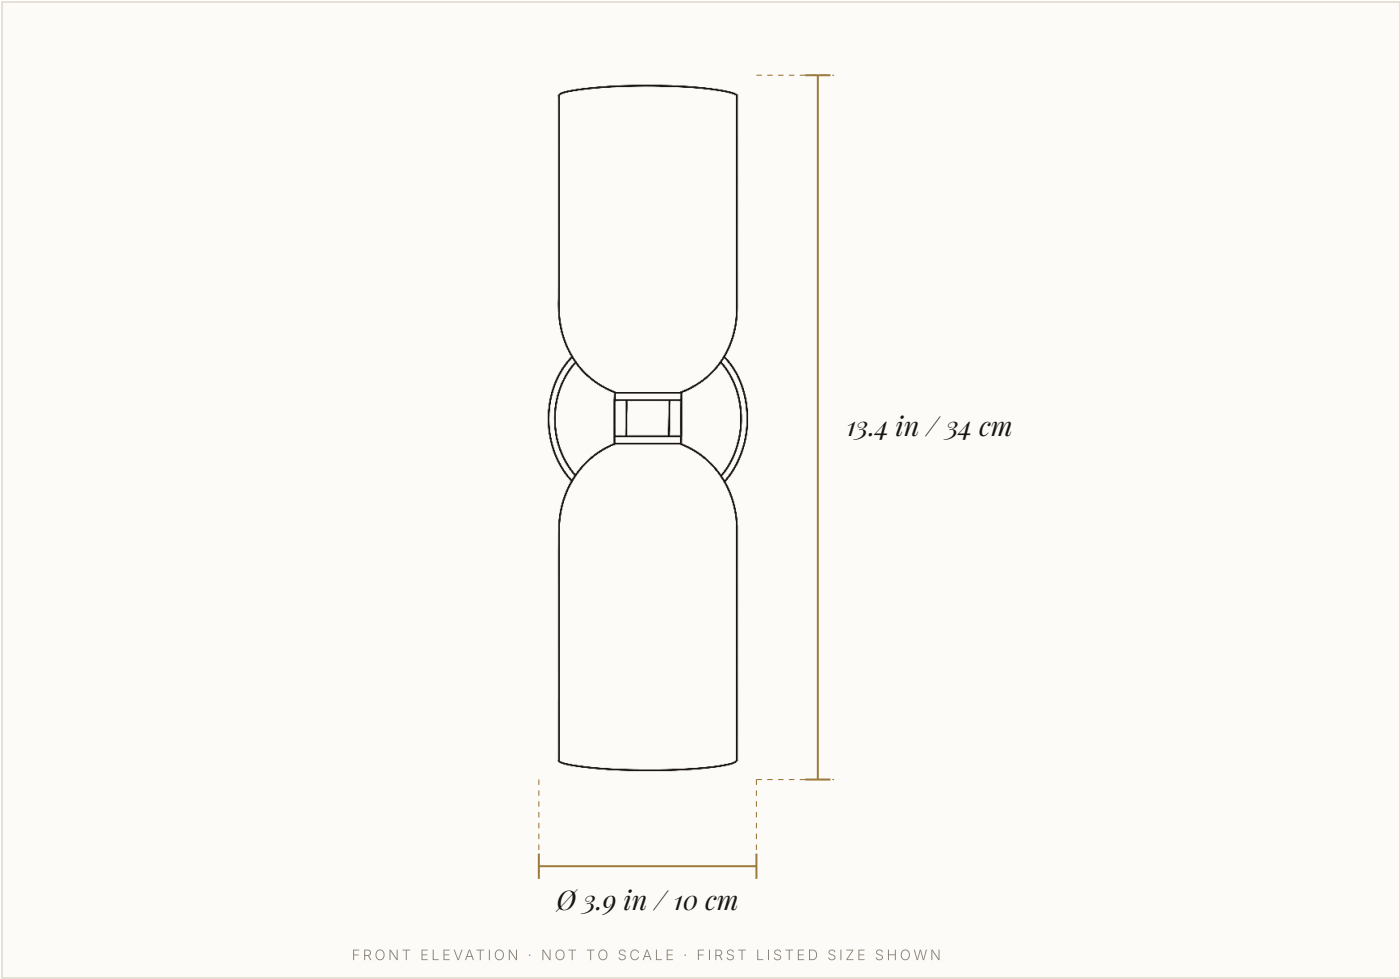

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT	EXTENSION FROM WALL
Small	Ø 3.9 in / 10 cm	13.4 in / 34 cm	4.7 in / 12 cm
Large	Ø 3.9 in / 10 cm	20.5 in / 52 cm	5.9 in / 15 cm (Large) from the wall

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiix

FIXTURE Nyx · Wall Sconces	
DRAWING NO. TX-WS-72672-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 13 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Nyx currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	FINISH	CATALOGUE NO.
Small · H 13.4 in	Copper	TX-WS-72672-01
Small · H 13.4 in	Black	TX-WS-72672-02
Small · H 13.4 in	Bronze	TX-WS-72672-03
Large · H 20.5 in	Copper	TX-WS-72672-04
Large · H 20.5 in	Black	TX-WS-72672-05
Large · H 20.5 in	Bronze	TX-WS-72672-06

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	AC 110–240V
LIGHT SOURCE	G9 bulbs (not included)
COLOR TEMPERATURE	Warm 2700–3000K LED recommended
DIMMING	Dimmable with dimmable bulbs and a compatible wall dimmer
RATING	IP20 damp rated, indoor only
INSTALLATION	Hardwired wall mount, damp rated; licensed electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

MOUNTING HEIGHT

Centre of the fixture about 60–66 in (152–168 cm) from the finished floor, near eye level.

BESIDE A MIRROR OR BED

A pair set roughly 36–40 in (91–102 cm) apart; beside a bed, about 24–30 in (61–76 cm) above the mattress.

HALLWAYS

Space sconces every 8–10 ft (2.4–3 m) for an even wash of light.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.

Returns. 30 days from delivery, no restocking fee.