

PENDANT LIGHTS

Onyx

Slim up/down linear LED pendant, matte black

A slim black line of light that washes up and down over your table.



SPECIFICATIONS

PRODUCT TYPE	Pendant Lights
WIDTH	39 in / 47 in / 59 in long, slim profile
HEIGHT	3 lengths — 39 / 47 / 59 in
MATERIALS & FINISH	Matte-black aluminum with frosted diffuser
LIGHT SOURCE	Integrated LED, up-and-down
COLOR TEMPERATURE	Neutral White / 3 Color Modes / Stepless Dimming
INSTALLATION	Cable-suspended ceiling pendant, adjustable drop, hardwired
WARRANTY	1-year limited warranty
IN THE BOX	Arrives with cables, ceiling mount and hardware
FINISH	matte black aluminum
LIGHTING	Neutral White / 3 Color Modes / Stepless Dimming (by option)

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

SIZE	COLOR TEMPERATURE
39, 47, 59	Neutral White, 3 Color Modes, Stepless dimming


PACK SIZE
Single, 2-Pack, 4-Pack, 6-Pack, 8-Pack

KEY FEATURES

- **Up & down light.** glows from both the top and bottom for layered ambient and task lighting
- **Integrated LED.** even, energy-efficient light with no bulbs to change
- **Lighting options.** Neutral White, 3 Color Modes, or Stepless Dimming
- **Slim matte-black profile.** a low, linear silhouette that suits modern, minimalist and industrial spaces
- **Three lengths.** 39 in, 47 in or 59 in to fit your table or island
- **Cable-suspended.** hangs level from thin steel cables at an adjustable height

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

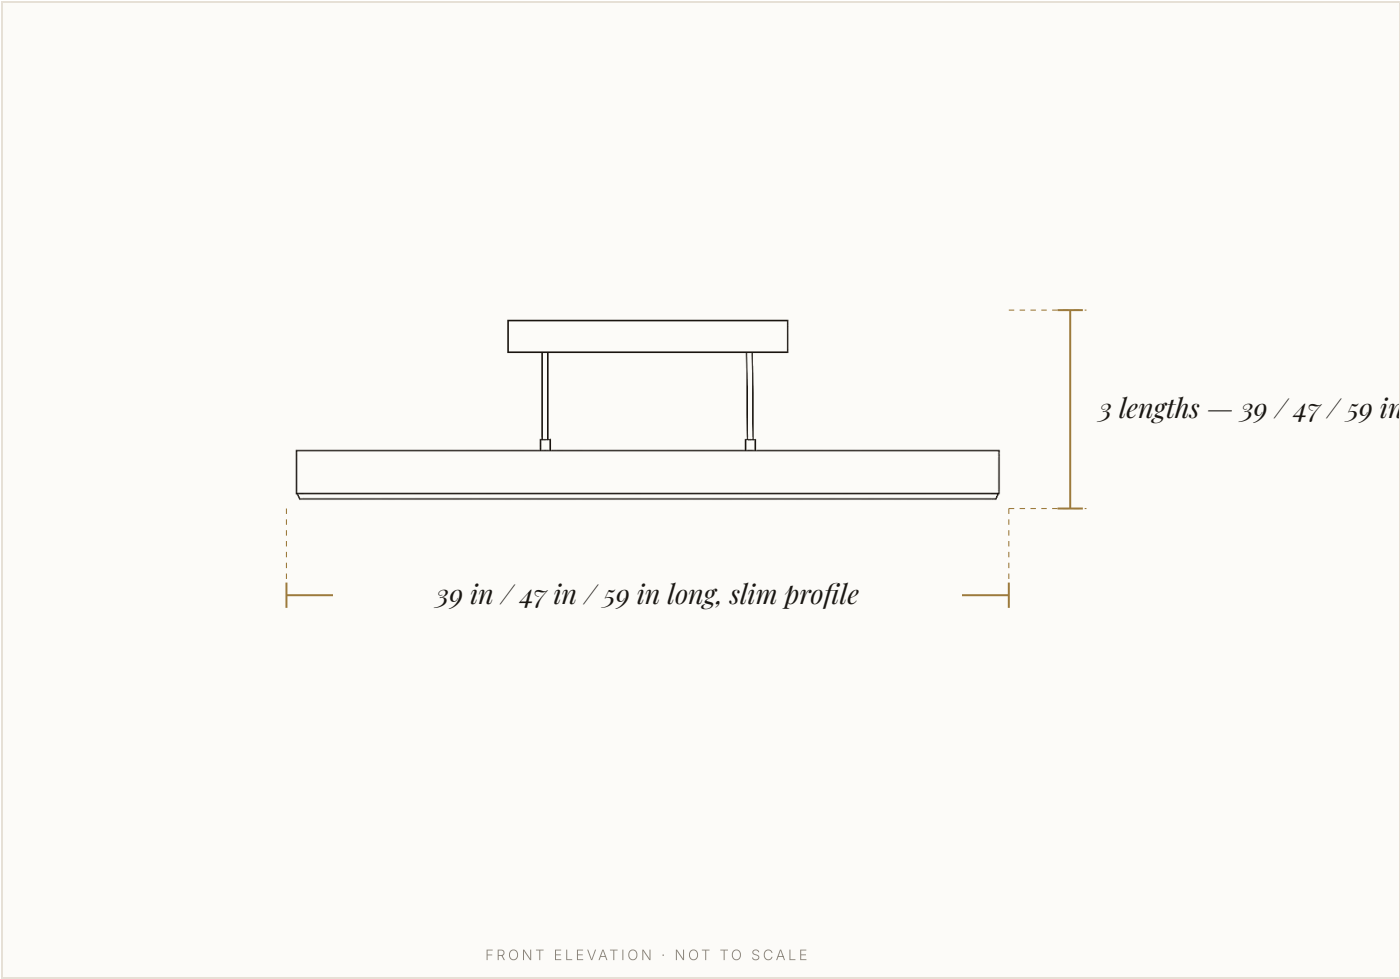

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Standard	39 in / 47 in / 59 in long, slim profile	3 lengths — 39 / 47 / 59 in

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Onyx · Pendant Lights	
DRAWING NO. TX-PD-27072-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Onyx currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	COLOR TEMPERATURE	PACK SIZE	CATALOGUE NO.
39	Neutral White	Single	TX-PD-27072-01
39	3 Color Modes	Single	TX-PD-27072-02
47	Neutral White	Single	TX-PD-27072-03
47	3 Color Modes	Single	TX-PD-27072-04
59	Neutral White	Single	TX-PD-27072-05
59	3 Color Modes	Single	TX-PD-27072-06
39	Neutral White	2-Pack	TX-PD-27072-07
39	3 Color Modes	2-Pack	TX-PD-27072-08
47	Neutral White	2-Pack	TX-PD-27072-09
47	3 Color Modes	2-Pack	TX-PD-27072-10
59	Neutral White	2-Pack	TX-PD-27072-11
59	3 Color Modes	2-Pack	TX-PD-27072-12
39	Neutral White	4-Pack	TX-PD-27072-13
39	3 Color Modes	4-Pack	TX-PD-27072-14
47	Neutral White	4-Pack	TX-PD-27072-15
47	3 Color Modes	4-Pack	TX-PD-27072-16
59	Neutral White	4-Pack	TX-PD-27072-17
59	3 Color Modes	4-Pack	TX-PD-27072-18
39	Neutral White	6-Pack	TX-PD-27072-19
39	3 Color Modes	6-Pack	TX-PD-27072-20
47	Neutral White	6-Pack	TX-PD-27072-21
47	3 Color Modes	6-Pack	TX-PD-27072-22
59	Neutral White	6-Pack	TX-PD-27072-23
59	3 Color Modes	6-Pack	TX-PD-27072-24
39	Neutral White	8-Pack	TX-PD-27072-25
39	3 Color Modes	8-Pack	TX-PD-27072-26
47	Neutral White	8-Pack	TX-PD-27072-27
47	3 Color Modes	8-Pack	TX-PD-27072-28
59	Neutral White	8-Pack	TX-PD-27072-29
59	3 Color Modes	8-Pack	TX-PD-27072-30
39	Stepless dimming	Single	TX-PD-27072-31
47	Stepless dimming	Single	TX-PD-27072-32
59	Stepless dimming	Single	TX-PD-27072-33
39	Stepless dimming	2-Pack	TX-PD-27072-34

SIZE	COLOR TEMPERATURE	PACK SIZE	CATALOGUE NO.
47	Stepless dimming	2-Pack	TX-PD-27072-35
59	Stepless dimming	2-Pack	TX-PD-27072-36
39	Stepless dimming	4-Pack	TX-PD-27072-37
47	Stepless dimming	4-Pack	TX-PD-27072-38
59	Stepless dimming	4-Pack	TX-PD-27072-39
39	Stepless dimming	6-Pack	TX-PD-27072-40
47	Stepless dimming	6-Pack	TX-PD-27072-41
59	Stepless dimming	6-Pack	TX-PD-27072-42
39	Stepless dimming	8-Pack	TX-PD-27072-43
47	Stepless dimming	8-Pack	TX-PD-27072-44
59	Stepless dimming	8-Pack	TX-PD-27072-45

For your electrician

ELECTRICAL

LIGHT SOURCE	Integrated LED, up-and-down
COLOR TEMPERATURE	Neutral White / 3 Color Modes / Stepless Dimming
INSTALLATION	Cable-suspended ceiling pendant, adjustable drop, hardwired

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

OVER A TABLE

Hang the bottom of the fixture 30–36 in (76–91 cm) above the tabletop; choose a width about one-half to two-thirds of the table.

OVER AN ISLAND

Space multiple pendants 24–30 in (61–76 cm) apart, 30–36 in above the counter.

OPEN AREAS

In halls and living spaces keep at least 84 in (7 ft / 213 cm) clear underneath; add about 3 in of drop per foot of ceiling above 8 ft.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.