

OUTDOOR WALL LIGHTS

Oriel



SPECIFICATIONS

PRODUCT TYPE	Outdoor Wall Lights
WIDTH	7.9 – 31.5 in / 20 – 80 cm (by size)
HEIGHT	2 in / 5 cm
EXTENSION FROM WALL	3.1 in / 7.9 cm
LIGHT SOURCE	Integrated LED
WEATHER RATING	Waterproof
INSTALLATION	Exterior wall mount
STYLE	Modern minimalist outdoor wall sconce with slim linear profile
FINISH	Clean black exterior for contemporary porch and patio spaces
LIGHTING	Integrated LED illumination for a smooth, even wall-wash effect

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

LENGTH	COLOR TEMPERATURE
7.9, 11.8, 19.7, 31.5	Warm White, White, Neutral White


PACK SIZE
Single, 2-Pack, 4-Pack, 6-Pack, 8-Pack

KEY FEATURES

- **Weather Resistance.** Waterproof design suitable for covered or exposed outdoor areas
- **Ideal For.** Front doors, porches, patios, exterior corridors, fence walls, and modern outdoor décor

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

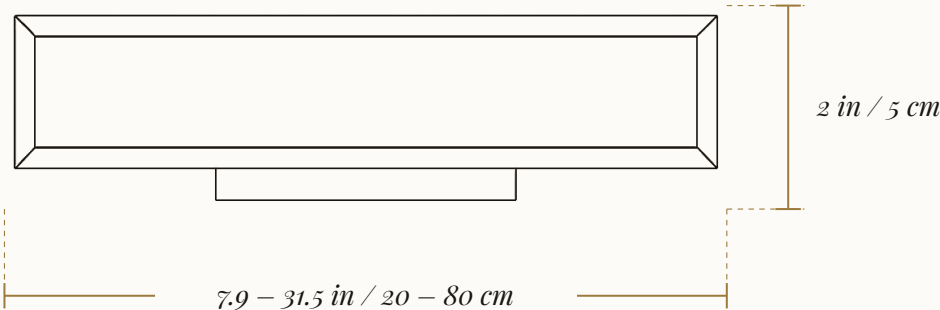

FRONT ELEVATION · NOT TO SCALE

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT	EXTENSION FROM WALL
By size	7.9 – 31.5 in / 20 – 80 cm	2 in / 5 cm	3.1 in / 7.9 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo FIXTURE Oriel · Outdoor Wall Lights	
DRAWING NO. TX-OW-71040-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Oriel currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

LENGTH	COLOR TEMPERATURE	PACK SIZE	CATALOGUE NO.
7.9	Warm White	Single	TX-0W-71040-01
7.9	Warm White	2-Pack	TX-0W-71040-02
7.9	Warm White	4-Pack	TX-0W-71040-03
7.9	Warm White	6-Pack	TX-0W-71040-04
7.9	Warm White	8-Pack	TX-0W-71040-05
7.9	White	Single	TX-0W-71040-06
7.9	White	2-Pack	TX-0W-71040-07
7.9	White	4-Pack	TX-0W-71040-08
7.9	White	6-Pack	TX-0W-71040-09
7.9	White	8-Pack	TX-0W-71040-10
11.8	Warm White	Single	TX-0W-71040-11
11.8	Warm White	2-Pack	TX-0W-71040-12
11.8	Warm White	4-Pack	TX-0W-71040-13
11.8	Warm White	6-Pack	TX-0W-71040-14
11.8	Warm White	8-Pack	TX-0W-71040-15
11.8	White	Single	TX-0W-71040-16
11.8	White	2-Pack	TX-0W-71040-17
11.8	White	4-Pack	TX-0W-71040-18
11.8	White	6-Pack	TX-0W-71040-19
11.8	White	8-Pack	TX-0W-71040-20
19.7	Warm White	Single	TX-0W-71040-21
19.7	Warm White	2-Pack	TX-0W-71040-22
19.7	Warm White	4-Pack	TX-0W-71040-23
19.7	Warm White	6-Pack	TX-0W-71040-24
19.7	Warm White	8-Pack	TX-0W-71040-25
19.7	White	Single	TX-0W-71040-26
19.7	White	2-Pack	TX-0W-71040-27
19.7	White	4-Pack	TX-0W-71040-28
19.7	White	6-Pack	TX-0W-71040-29
19.7	White	8-Pack	TX-0W-71040-30
7.9	Neutral White	Single	TX-0W-71040-31
7.9	Neutral White	2-Pack	TX-0W-71040-32
7.9	Neutral White	4-Pack	TX-0W-71040-33
7.9	Neutral White	6-Pack	TX-0W-71040-34

LENGTH	COLOR TEMPERATURE	PACK SIZE	CATALOGUE NO.
7.9	Neutral White	8-Pack	TX-0W-71040-35
11.8	Neutral White	Single	TX-0W-71040-36
11.8	Neutral White	2-Pack	TX-0W-71040-37
11.8	Neutral White	4-Pack	TX-0W-71040-38
11.8	Neutral White	6-Pack	TX-0W-71040-39
11.8	Neutral White	8-Pack	TX-0W-71040-40
19.7	Neutral White	Single	TX-0W-71040-41
19.7	Neutral White	2-Pack	TX-0W-71040-42
19.7	Neutral White	4-Pack	TX-0W-71040-43
19.7	Neutral White	6-Pack	TX-0W-71040-44
19.7	Neutral White	8-Pack	TX-0W-71040-45
31.5	Warm White	Single	TX-0W-71040-46
31.5	Warm White	2-Pack	TX-0W-71040-47
31.5	Warm White	4-Pack	TX-0W-71040-48
31.5	Warm White	6-Pack	TX-0W-71040-49
31.5	Warm White	8-Pack	TX-0W-71040-50
31.5	White	Single	TX-0W-71040-51
31.5	White	2-Pack	TX-0W-71040-52
31.5	White	4-Pack	TX-0W-71040-53
31.5	White	6-Pack	TX-0W-71040-54
31.5	White	8-Pack	TX-0W-71040-55
31.5	Neutral White	Single	TX-0W-71040-56
31.5	Neutral White	2-Pack	TX-0W-71040-57
31.5	Neutral White	4-Pack	TX-0W-71040-58
31.5	Neutral White	6-Pack	TX-0W-71040-59
31.5	Neutral White	8-Pack	TX-0W-71040-60

For your electrician

ELECTRICAL

LIGHT SOURCE	Integrated LED
RATING	Waterproof
INSTALLATION	Exterior wall mount

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR
Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING
Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER
Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.