

OUTDOOR WALL LIGHTS

Outdoor Concrete Wall Light, Waterproof LED Porch Sconce

Waterproof cast-concrete outdoor up/down wall light

A cast-concrete wall light that washes warm glow up and down your facade.



SPECIFICATIONS

PRODUCT TYPE	Outdoor Wall Lights
WIDTH	~3.15 in / 8 cm
HEIGHT	1.97 in / 5 cm · 5.91 in / 15 cm
MATERIALS & FINISH	Cast concrete — Light Concrete Gray or Gray-Black
LIGHT SOURCE	Integrated warm-white LED, up/down glow
COLOR TEMPERATURE	Warm white
WEATHER RATING	Waterproof, outdoor-rated
INSTALLATION	Wall-mounted, hardwired — electrician recommended
WARRANTY	1-year limited warranty
IN THE BOX	Arrives with wall-mount hardware and fitting guide
RATING	waterproof, outdoor rated

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


SHAPE	FINISH
Rectangular, Round	Gray Black, Light Concrete Gray
SIZE	
3.15 "Lx1.97 "H, 3.15 "Lx5.91 "H	

KEY FEATURES

- Real cast concrete body with a matte cement texture
- Rectangular or round shapes to suit your facade
- **Two heights.** compact or taller up and down
- Warm up and down glow from an integrated LED
- Light Concrete Gray or Gray Black finishes
- Waterproof, outdoor rated design

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

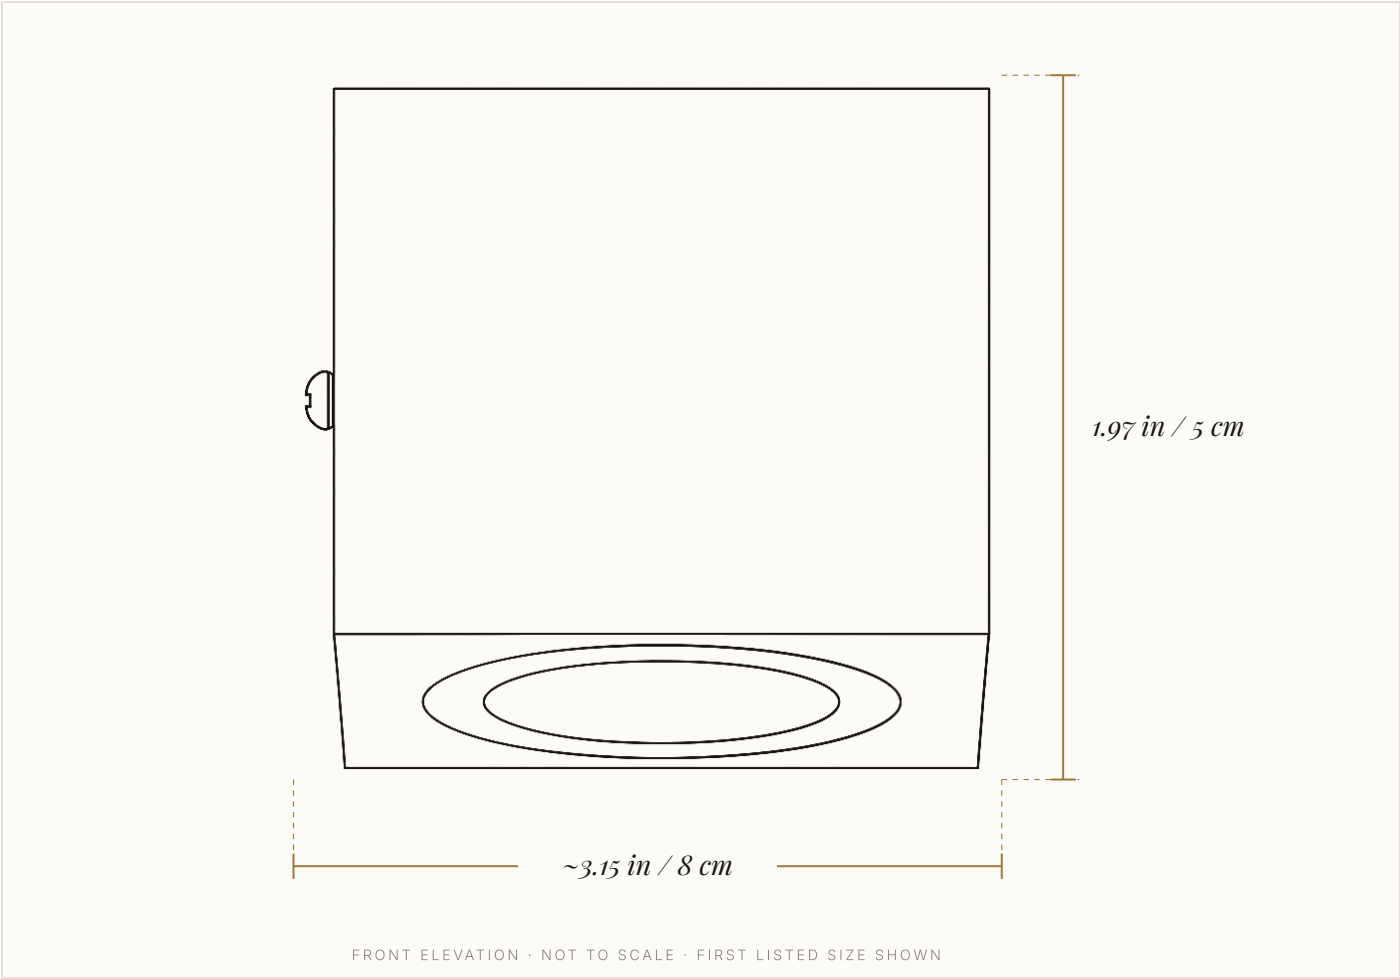

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
3.15 "Lx1.97 "H	~3.15 in / 8 cm	1.97 in / 5 cm
3.15 "Lx5.91 "H	~3.15 in / 8 cm	5.91 in / 15 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo

FIXTURE
Outdoor Concrete Wall Light, Waterproof LED Porch Sconce ·
Outdoor Wall Lights

DRAWING NO. TX-OW-21376-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Outdoor Concrete Wall Light, Waterproof LED Porch Sconce currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SHAPE	FINISH	SIZE	CATALOGUE NO.
Rectangular	Gray Black	3.15 "Lx1.97 "H	TX-OW-21376-01
Rectangular	Light Concrete Gray	3.15 "Lx1.97 "H	TX-OW-21376-02
Round	Gray Black	3.15 "Lx1.97 "H	TX-OW-21376-03
Round	Light Concrete Gray	3.15 "Lx1.97 "H	TX-OW-21376-04
Rectangular	Gray Black	3.15 "Lx5.91 "H	TX-OW-21376-05
Rectangular	Light Concrete Gray	3.15 "Lx5.91 "H	TX-OW-21376-06
Round	Gray Black	3.15 "Lx5.91 "H	TX-OW-21376-07
Round	Light Concrete Gray	3.15 "Lx5.91 "H	TX-OW-21376-08

FROM THE PRODUCT LISTING

Choose the shorter height for a subtle accent, or the taller version for a more dramatic up and down wash.

Wipe with a soft damp cloth. Concrete has natural variation in speckle and tone, which is part of its character.

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

1-year limited warranty Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

PACKAGING

Arrives with wall-mount hardware and fitting guide

For your electrician

ELECTRICAL

LIGHT SOURCE	Integrated warm-white LED, up/down glow
COLOR TEMPERATURE	Warm white
RATING	Waterproof, outdoor-rated
INSTALLATION	Wall-mounted, hardwired — electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR
Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING
Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER
Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.