

CHANDELIERS

Perle

Frosted glass globe cluster chandelier

A cloud of frosted glass globes that glows soft and even, scaled from a compact 19 to a statement 73.



SPECIFICATIONS

PRODUCT TYPE	Chandeliers
WIDTH	Ø 23.6 in / 60 cm (25 globes) · Ø 15.8 in / 40 cm (19) · Ø 29.5 in / 75 cm (31) · Ø 31.5 in / 80 cm (37) · Ø 39.4 in / 100 cm (73)
HEIGHT	29.5 in / 75 cm (25 globes) · 33.5 in / 85 cm (19) · 29.5 in / 75 cm (31) · 39.4 in / 100 cm (37) · 59 in / 150 cm (73)
MATERIALS & FINISH	Metal frame with frosted white glass globes
LIGHT SOURCE	One light per frosted glass globe
VOLTAGE	AC 110–240V
INSTALLATION	Hardwired ceiling mount for flat ceilings; licensed electrician recommended
FINISH	gold, black or chrome
DIMMING	Triac-dimmable build available on request

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


SIZE	FINISH
25 globes · Ø 23.6 in, 19 globes · Ø 15.8 in, 31 globes · Ø 29.5 in, 37 globes · Ø 31.5 in, 73 globes · Ø 39.4 in	Gold, Black, Chrome

KEY FEATURES

- **Frosted glass globes.** each sphere glows soft and even, with no visible hot spots
- **Three finishes.** gold, black or chrome rods and canopy
- **Room-ready scale.** suits standard 8–9 ft ceilings and taller spaces
- **Five sizes.** from 19 globes (Ø 15.8 in) to a 73-globe statement (Ø 39.4 in)
- **Cloud-like silhouette.** globes of varied sizes cluster into an organic, sculptural shape

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

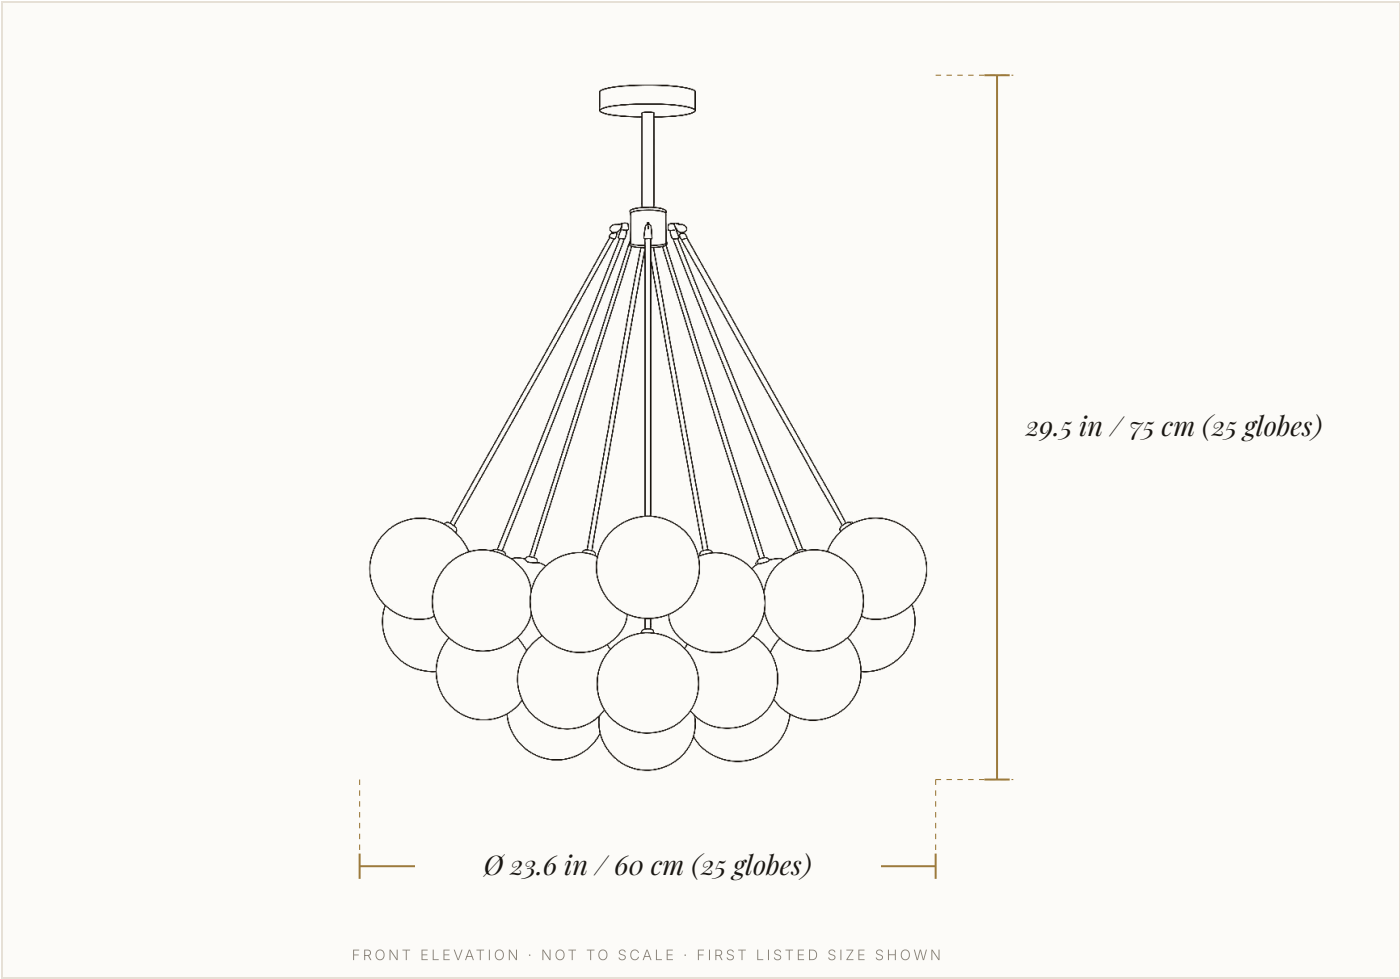

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
25 globes · Ø 23.6 in	Ø 23.6 in / 60 cm (25 globes)	29.5 in / 75 cm (25 globes)
19 globes · Ø 15.8 in	Ø 15.8 in / 40 cm (19)	33.5 in / 85 cm (19)
31 globes · Ø 29.5 in	Ø 29.5 in / 75 cm (31)	29.5 in / 75 cm (31)
37 globes · Ø 31.5 in	Ø 31.5 in / 80 cm (37)	39.4 in / 100 cm (37)
73 globes · Ø 39.4 in	Ø 39.4 in / 100 cm (73)	59 in / 150 cm (73)

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo

FIXTURE Perle · Chandeliers	
DRAWING NO. TX-CH-86560-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 13 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Perle currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	FINISH	CATALOGUE NO.
25 globes · Ø 23.6 in	Gold	TX-CH-86560-01
25 globes · Ø 23.6 in	Black	TX-CH-86560-02
25 globes · Ø 23.6 in	Chrome	TX-CH-86560-03
19 globes · Ø 15.8 in	Gold	TX-CH-86560-04
19 globes · Ø 15.8 in	Black	TX-CH-86560-05
19 globes · Ø 15.8 in	Chrome	TX-CH-86560-06
31 globes · Ø 29.5 in	Gold	TX-CH-86560-07
31 globes · Ø 29.5 in	Black	TX-CH-86560-08
31 globes · Ø 29.5 in	Chrome	TX-CH-86560-09
37 globes · Ø 31.5 in	Gold	TX-CH-86560-10
37 globes · Ø 31.5 in	Black	TX-CH-86560-11
37 globes · Ø 31.5 in	Chrome	TX-CH-86560-12
73 globes · Ø 39.4 in	Gold	TX-CH-86560-13
73 globes · Ø 39.4 in	Black	TX-CH-86560-14
73 globes · Ø 39.4 in	Chrome	TX-CH-86560-15

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	AC 110–240V
LIGHT SOURCE	One light per frosted glass globe
DIMMING	Triac-dimmable build available on request
INSTALLATION	Hardwired ceiling mount for flat ceilings; licensed electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

OVER A TABLE

Hang the bottom of the fixture 30–36 in (76–91 cm) above the tabletop; choose a width about one-half to two-thirds of the table.

OVER AN ISLAND

Space multiple pendants 24–30 in (61–76 cm) apart, 30–36 in above the counter.

OPEN AREAS

In halls and living spaces keep at least 84 in (7 ft / 213 cm) clear underneath; add about 3 in of drop per foot of ceiling above 8 ft.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.

Returns. 30 days from delivery, no restocking fee.