

SEMI FLUSH CEILING LIGHTS

# Posy

Scalloped fabric semi-flush ceiling light

*A softly scalloped fabric drum with an embossed floral relief and a turned walnut stem, glowing warm and even.*



SPECIFICATIONS

|                    |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| PRODUCT TYPE       | Semi Flush Ceiling Lights                                                           |
| WIDTH              | Ø 13.7 in / 35 cm (Small) · Ø 17.7 in / 45 cm (Medium) · Ø 21.6 in / 55 cm (Large)  |
| HEIGHT             | 11.8 in / 30 cm (Small) · 11.8 in / 30 cm (Medium) · 11.8 in / 30 cm (Large)        |
| MATERIALS & FINISH | Fabric shade with embossed floral relief, walnut wood stem and finial, metal canopy |
| LIGHT SOURCE       | Integrated LED, about 36W / 54W / 60W by size                                       |
| COLOR TEMPERATURE  | 3000K warm white                                                                    |
| DIMMING            | Triac dimmable with an external Triac driver                                        |
| INSTALLATION       | Hardwired ceiling mount, dry locations only; licensed electrician recommended       |
| RATING             | indoor, dry locations only                                                          |

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


SIZE  
Ø 13.7 in, Ø 17.7 in, Ø 21.6 in

KEY FEATURES

- **Embossed floral relief.** a textured fabric surface that reads as sculptural, lit or unlit
- **Integrated warm LED.** 3000K warm white, rated about 50,000 hours
- **Dimmable.** Triac compatible with an external Triac driver
- **Walnut wood details.** a turned stem and ball finial
- **Three sizes.** Ø 13.7 in, 17.7 in or 21.6 in

|         |                    |          |                |
|---------|--------------------|----------|----------------|
| PROJECT | FIXTURE TYPE / TAG | LOCATION | QTY · APPROVED |
|---------|--------------------|----------|----------------|

Dimensions

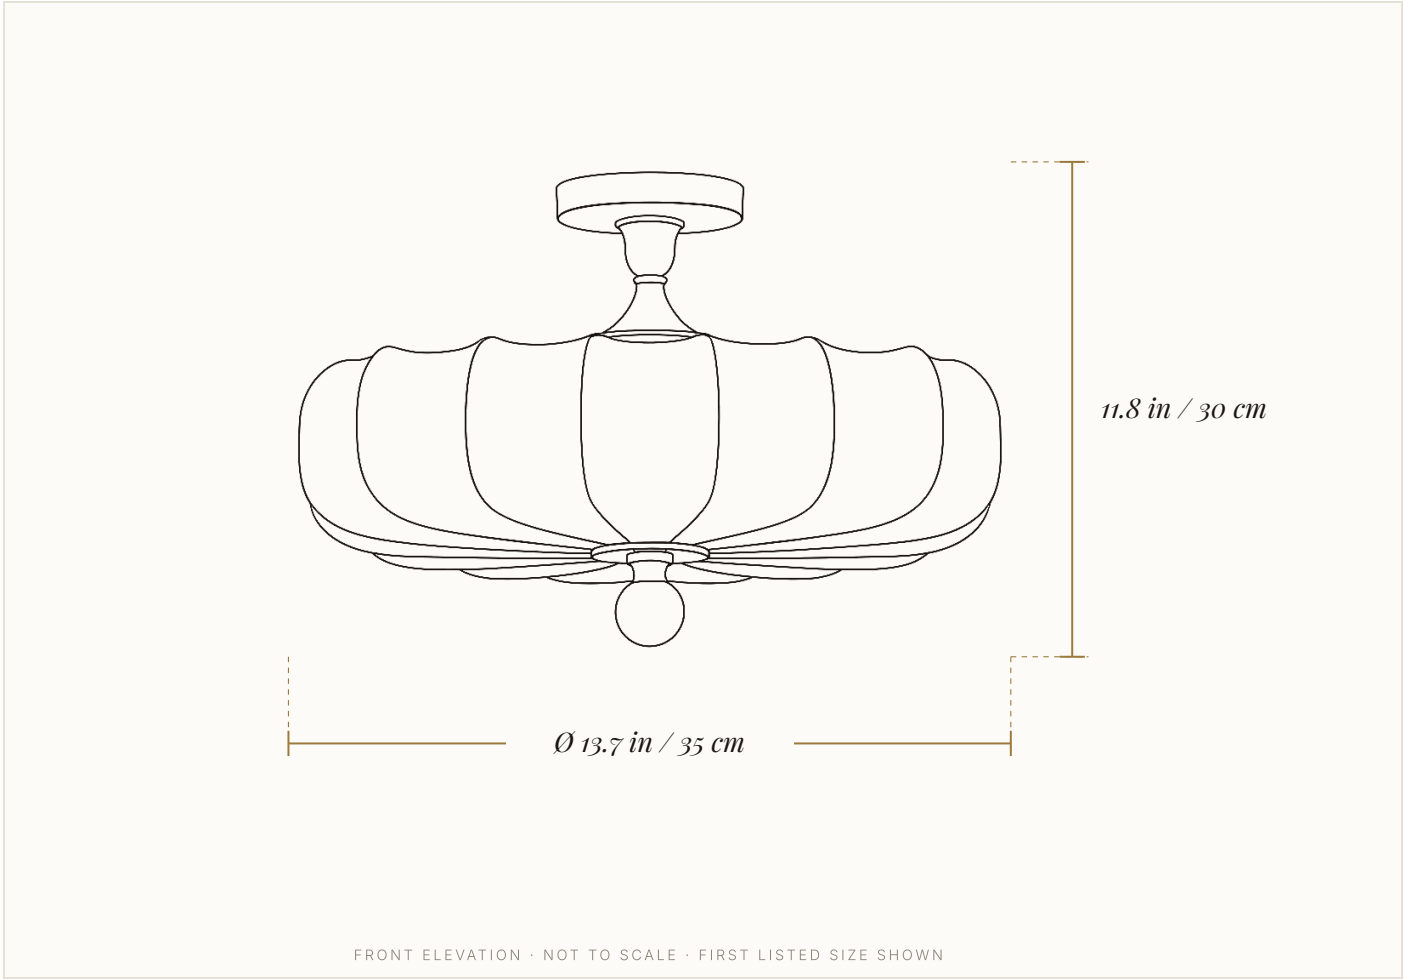

AVAILABLE SIZES

| SIZE   | WIDTH             | HEIGHT          |
|--------|-------------------|-----------------|
| Small  | Ø 13.7 in / 35 cm | 11.8 in / 30 cm |
| Medium | Ø 17.7 in / 45 cm | 11.8 in / 30 cm |
| Large  | Ø 21.6 in / 55 cm | 11.8 in / 30 cm |

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo

FIXTURE  
Posy · Semi Flush Ceiling Lights

DRAWING NO.  
TX-CL-73280-D1

VIEW  
Front elevation

SCALE  
Not to scale

UNITS  
in / cm

ISSUED  
13 Oct 2026

REVISION  
A

## Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Posy currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

### CONFIGURATIONS

| SIZE      | CATALOGUE NO.  |
|-----------|----------------|
| Ø 13.7 in | TX-CL-73280-01 |
| Ø 17.7 in | TX-CL-73280-02 |
| Ø 21.6 in | TX-CL-73280-03 |

### CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

### WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

|                   |                                                                               |
|-------------------|-------------------------------------------------------------------------------|
| LIGHT SOURCE      | Integrated LED, about 36W / 54W / 60W by size                                 |
| COLOR TEMPERATURE | 3000K warm white                                                              |
| DIMMING           | Triac dimmable with an external Triac driver                                  |
| RATING            | indoor, dry locations only                                                    |
| INSTALLATION      | Hardwired ceiling mount, dry locations only; licensed electrician recommended |

WIRING (GENERAL GUIDANCE)

| FIXTURE WIRE          | CONNECT TO |
|-----------------------|------------|
| ● Black (or ribbed)   | Line / hot |
| ○ White (or smooth)   | Neutral    |
| ● Green / bare copper | Ground     |

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

ROOM SIZE

Add the room's length and width in feet; that number in inches is a good fixture diameter.

CLEARANCE

Keep at least 84 in (7 ft / 213 cm) from the floor to the bottom of the fixture in walkways.

OVER A TABLE

Choose a fixture about one-half to two-thirds of the table width; a flush or semi-flush mount suits ceilings under 8–9 ft.

**Safety.** Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiixo.com  
9am – 5pm Eastern, seven days. We reply within 12 hours.

**Returns.** 30 days from delivery, no restocking fee.