

OUTDOOR LIGHTING

Rill

Recessed in-ground LED strip, stainless steel, warm to RGB

A flush line of light set into the ground — architecture, with no fixture in sight.



SPECIFICATIONS

PRODUCT TYPE	Outdoor Lighting
WIDTH	1.18 in · 1.97 in wide
HEIGHT	19.69 in · 39.37 in long
MATERIALS & FINISH	Brushed stainless steel with tempered-glass face
LIGHT SOURCE	Integrated LED
COLOR TEMPERATURE	Warm white, cool white, yellow, or RGB (controller incl.)
INSTALLATION	Recessed in-ground, flush mount; low-voltage, fully waterproof
IN THE BOX	Single, 2, 4, 6 or 8-pack
BODY	stainless steel with tempered-glass face
POWER	low-voltage; weatherproof for in-ground outdoor use

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

COLOR TEMPERATURE	SIZE
Warm White, Cool White, Yellow, Colorful, RGB With Controller	39.37 "Lx1.18 "W, 39.37 "Lx1.97 "W, 19.69 "Lx1.18 "W, 19.69 "Lx1.97 "W


PACK SIZE
Single, 2-Pack, 4-Pack, 6-Pack, 8-Pack

KEY FEATURES

- Recessed, flush profile — brushed stainless steel with a tempered-glass top; disappears into hardscape.
- Fully waterproof, low-voltage — built for patios, paths, steps, walls and courtyards, year-round.
- Project pack sizes. single through 8-pack for small accents or full layouts.
- Warm, cool, yellow or RGB — pick a fixed white or full-color RGB with controller for scenes.
- Multiple lengths & widths. 19.7 or 39.4 in long, 1.18 or 1.97 in wide, to fit any run.
- Length. 19.69 in or 39.37 in

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

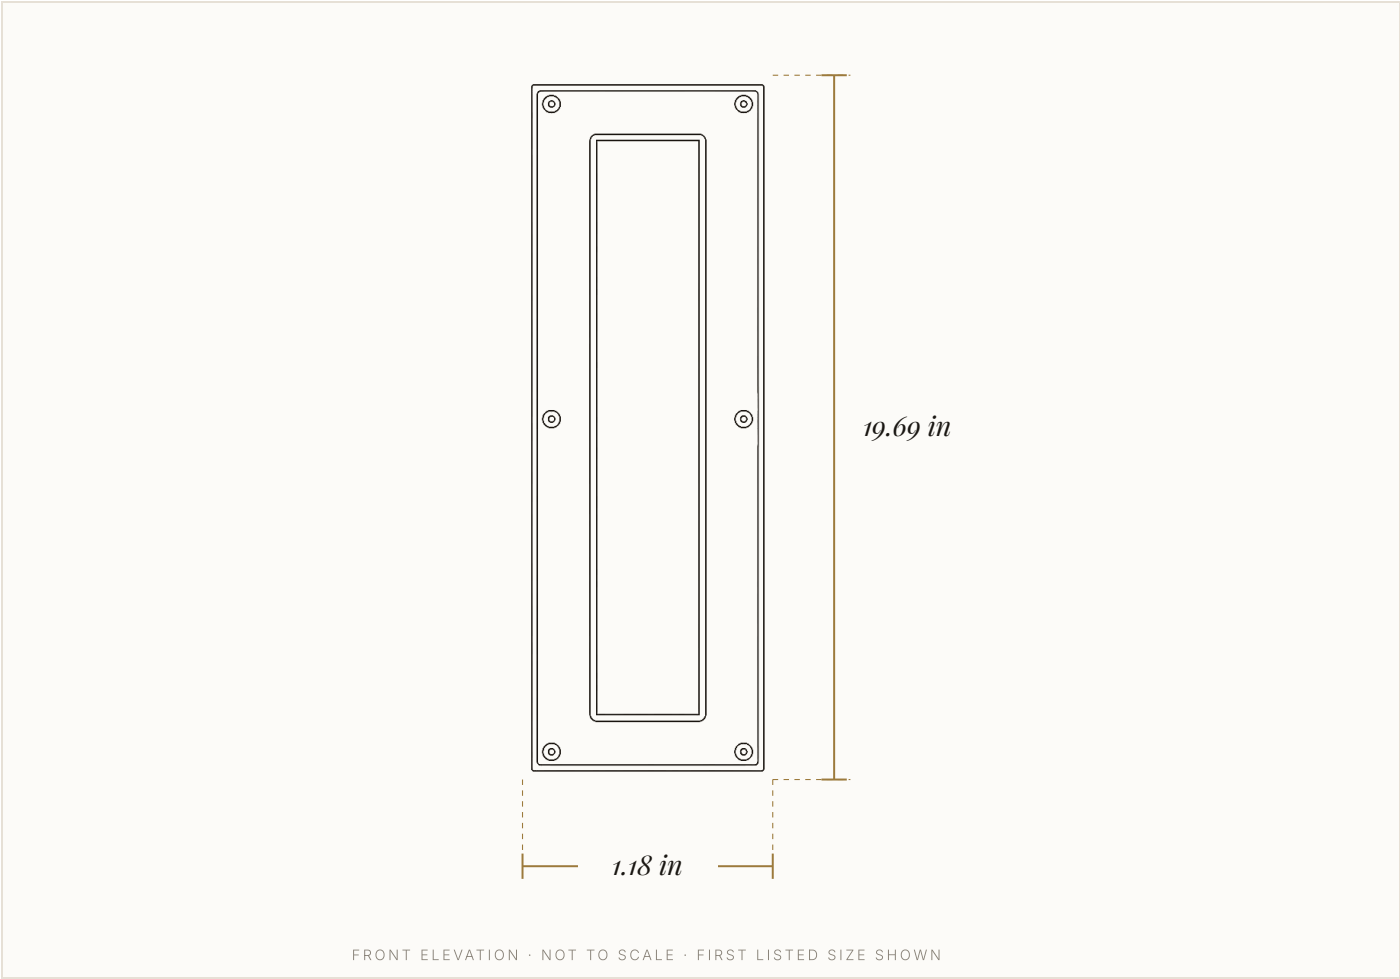

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Option 1	1.18 in	19.69 in
Option 2	1.97 in wide	39.37 in long

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo

FIXTURE
Rill · Outdoor Lighting

DRAWING NO.
TX-OL-49664-D1

VIEW
Front elevation

SCALE
Not to scale

UNITS
in / cm

ISSUED
7 Oct 2026

REVISION
A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Rill currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

COLOR TEMPERATURE	SIZE	PACK SIZE	CATALOGUE NO.
Warm White	39.37 "Lx1.18 "W	Single	TX-OL-49664-01
Warm White	39.37 "Lx1.18 "W	2-Pack	TX-OL-49664-02
Warm White	39.37 "Lx1.18 "W	4-Pack	TX-OL-49664-03
Warm White	39.37 "Lx1.18 "W	6-Pack	TX-OL-49664-04
Warm White	39.37 "Lx1.18 "W	8-Pack	TX-OL-49664-05
Warm White	39.37 "Lx1.97 "W	Single	TX-OL-49664-06
Warm White	39.37 "Lx1.97 "W	2-Pack	TX-OL-49664-07
Warm White	39.37 "Lx1.97 "W	4-Pack	TX-OL-49664-08
Warm White	39.37 "Lx1.97 "W	6-Pack	TX-OL-49664-09
Warm White	39.37 "Lx1.97 "W	8-Pack	TX-OL-49664-10
Warm White	19.69 "Lx1.18 "W	Single	TX-OL-49664-11
Warm White	19.69 "Lx1.18 "W	2-Pack	TX-OL-49664-12
Warm White	19.69 "Lx1.18 "W	4-Pack	TX-OL-49664-13
Warm White	19.69 "Lx1.18 "W	6-Pack	TX-OL-49664-14
Warm White	19.69 "Lx1.18 "W	8-Pack	TX-OL-49664-15
Warm White	19.69 "Lx1.97 "W	Single	TX-OL-49664-16
Warm White	19.69 "Lx1.97 "W	2-Pack	TX-OL-49664-17
Warm White	19.69 "Lx1.97 "W	4-Pack	TX-OL-49664-18
Warm White	19.69 "Lx1.97 "W	6-Pack	TX-OL-49664-19
Warm White	19.69 "Lx1.97 "W	8-Pack	TX-OL-49664-20
Cool White	39.37 "Lx1.18 "W	Single	TX-OL-49664-21
Cool White	39.37 "Lx1.18 "W	2-Pack	TX-OL-49664-22
Cool White	39.37 "Lx1.18 "W	4-Pack	TX-OL-49664-23
Cool White	39.37 "Lx1.18 "W	6-Pack	TX-OL-49664-24
Cool White	39.37 "Lx1.18 "W	8-Pack	TX-OL-49664-25
Cool White	39.37 "Lx1.97 "W	Single	TX-OL-49664-26
Cool White	39.37 "Lx1.97 "W	2-Pack	TX-OL-49664-27
Cool White	39.37 "Lx1.97 "W	4-Pack	TX-OL-49664-28
Cool White	39.37 "Lx1.97 "W	6-Pack	TX-OL-49664-29
Cool White	39.37 "Lx1.97 "W	8-Pack	TX-OL-49664-30
Cool White	19.69 "Lx1.18 "W	Single	TX-OL-49664-31
Cool White	19.69 "Lx1.18 "W	2-Pack	TX-OL-49664-32
Cool White	19.69 "Lx1.18 "W	4-Pack	TX-OL-49664-33
Cool White	19.69 "Lx1.18 "W	6-Pack	TX-OL-49664-34

COLOR TEMPERATURE	SIZE	PACK SIZE	CATALOGUE NO.
Cool White	19.69 "Lx1.18 "W	8-Pack	TX-OL-49664-35
Cool White	19.69 "Lx1.97 "W	Single	TX-OL-49664-36
Cool White	19.69 "Lx1.97 "W	2-Pack	TX-OL-49664-37
Cool White	19.69 "Lx1.97 "W	4-Pack	TX-OL-49664-38
Cool White	19.69 "Lx1.97 "W	6-Pack	TX-OL-49664-39
Cool White	19.69 "Lx1.97 "W	8-Pack	TX-OL-49664-40
Yellow	39.37 "Lx1.18 "W	Single	TX-OL-49664-41
Yellow	39.37 "Lx1.18 "W	2-Pack	TX-OL-49664-42
Yellow	39.37 "Lx1.18 "W	4-Pack	TX-OL-49664-43
Yellow	39.37 "Lx1.18 "W	6-Pack	TX-OL-49664-44
Yellow	39.37 "Lx1.18 "W	8-Pack	TX-OL-49664-45
Yellow	39.37 "Lx1.97 "W	Single	TX-OL-49664-46
Yellow	39.37 "Lx1.97 "W	2-Pack	TX-OL-49664-47
Yellow	39.37 "Lx1.97 "W	4-Pack	TX-OL-49664-48
Yellow	39.37 "Lx1.97 "W	6-Pack	TX-OL-49664-49
Yellow	39.37 "Lx1.97 "W	8-Pack	TX-OL-49664-50
Yellow	19.69 "Lx1.18 "W	Single	TX-OL-49664-51
Yellow	19.69 "Lx1.18 "W	2-Pack	TX-OL-49664-52
Yellow	19.69 "Lx1.18 "W	4-Pack	TX-OL-49664-53
Yellow	19.69 "Lx1.18 "W	6-Pack	TX-OL-49664-54
Yellow	19.69 "Lx1.18 "W	8-Pack	TX-OL-49664-55
Yellow	19.69 "Lx1.97 "W	Single	TX-OL-49664-56
Yellow	19.69 "Lx1.97 "W	2-Pack	TX-OL-49664-57
Yellow	19.69 "Lx1.97 "W	4-Pack	TX-OL-49664-58
Yellow	19.69 "Lx1.97 "W	6-Pack	TX-OL-49664-59
Yellow	19.69 "Lx1.97 "W	8-Pack	TX-OL-49664-60
Colorful	39.37 "Lx1.97 "W	Single	TX-OL-49664-61
Colorful	39.37 "Lx1.97 "W	2-Pack	TX-OL-49664-62
Colorful	39.37 "Lx1.97 "W	4-Pack	TX-OL-49664-63
Colorful	39.37 "Lx1.97 "W	6-Pack	TX-OL-49664-64
Colorful	39.37 "Lx1.97 "W	8-Pack	TX-OL-49664-65
RGB With Controller	39.37 "Lx1.97 "W	Single	TX-OL-49664-66
RGB With Controller	39.37 "Lx1.97 "W	2-Pack	TX-OL-49664-67
RGB With Controller	39.37 "Lx1.97 "W	4-Pack	TX-OL-49664-68

Ordering information, continued

COLOR TEMPERATURE	SIZE	PACK SIZE	CATALOGUE NO.
RGB With Controller	39.37 "Lx1.97 "W	6-Pack	TX-OL-49664-69
RGB With Controller	39.37 "Lx1.97 "W	8-Pack	TX-OL-49664-70

For your electrician

ELECTRICAL

LIGHT SOURCE	Integrated LED
POWER	low-voltage; weatherproof for in-ground outdoor use
COLOR TEMPERATURE	Warm white, cool white, yellow, or RGB (controller incl.)
INSTALLATION	Recessed in-ground, flush mount; low-voltage, fully waterproof

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Run cable to the fixture location in conduit or direct-burial cable as your local code requires, and mount the fixture on its base or stake.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ GFCI-protected outdoor circuit
- ☐ Cable route planned (conduit or direct-burial)
- ☐ Supply voltage confirmed for your region
- ☐ Utility lines located before digging (call 811 in the US)
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

SPACING
Space path lights every 6–8 ft (1.8–2.4 m), staggered on both sides for a natural rhythm.

SETBACK
Set them 6–12 in (15–30 cm) back from the edge of the path or bed.

AIMING
Aim spotlights from the ground up into foliage or walls, away from neighbours' windows.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.