

PENDANT LIGHTS

Saku

Organic Wabi-Sabi pebble pendant, handcrafted resin, Ø 30–60 cm

A hand-formed resin pebble that turns a bare bulb into a soft, sculptural pool of warm light.



SPECIFICATIONS

PRODUCT TYPE	Pendant Lights
WIDTH	Diameter 30 / 40 / 50 / 60 cm (12–24 in)
HEIGHT	Shade 18–30 cm · cord adjustable up to 150 cm
MATERIALS & FINISH	Hand-formed matte resin
DIFFUSER	Solid resin shade, warm downward glow
LIGHT SOURCE	E27 socket, LED-compatible bulb (not included)
COLOR TEMPERATURE	Warm white (bulb-dependent)
INSTALLATION	Ceiling pendant
WARRANTY	1-year limited
IN THE BOX	Ships boxed with shade, cord and canopy; carton approx. 55 × 55 × 45 cm (varies by size)

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

BODY TYPE

A-White, A-Grey, B-White, B-Grey

SIZE


11.8 in (30 cm) Diameter, 15.7 in (40 cm) Diameter, 19.7 in (50 cm) Diameter, 23.6 in (60 cm) Diameter

COLOR

Cool White, Warm White

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

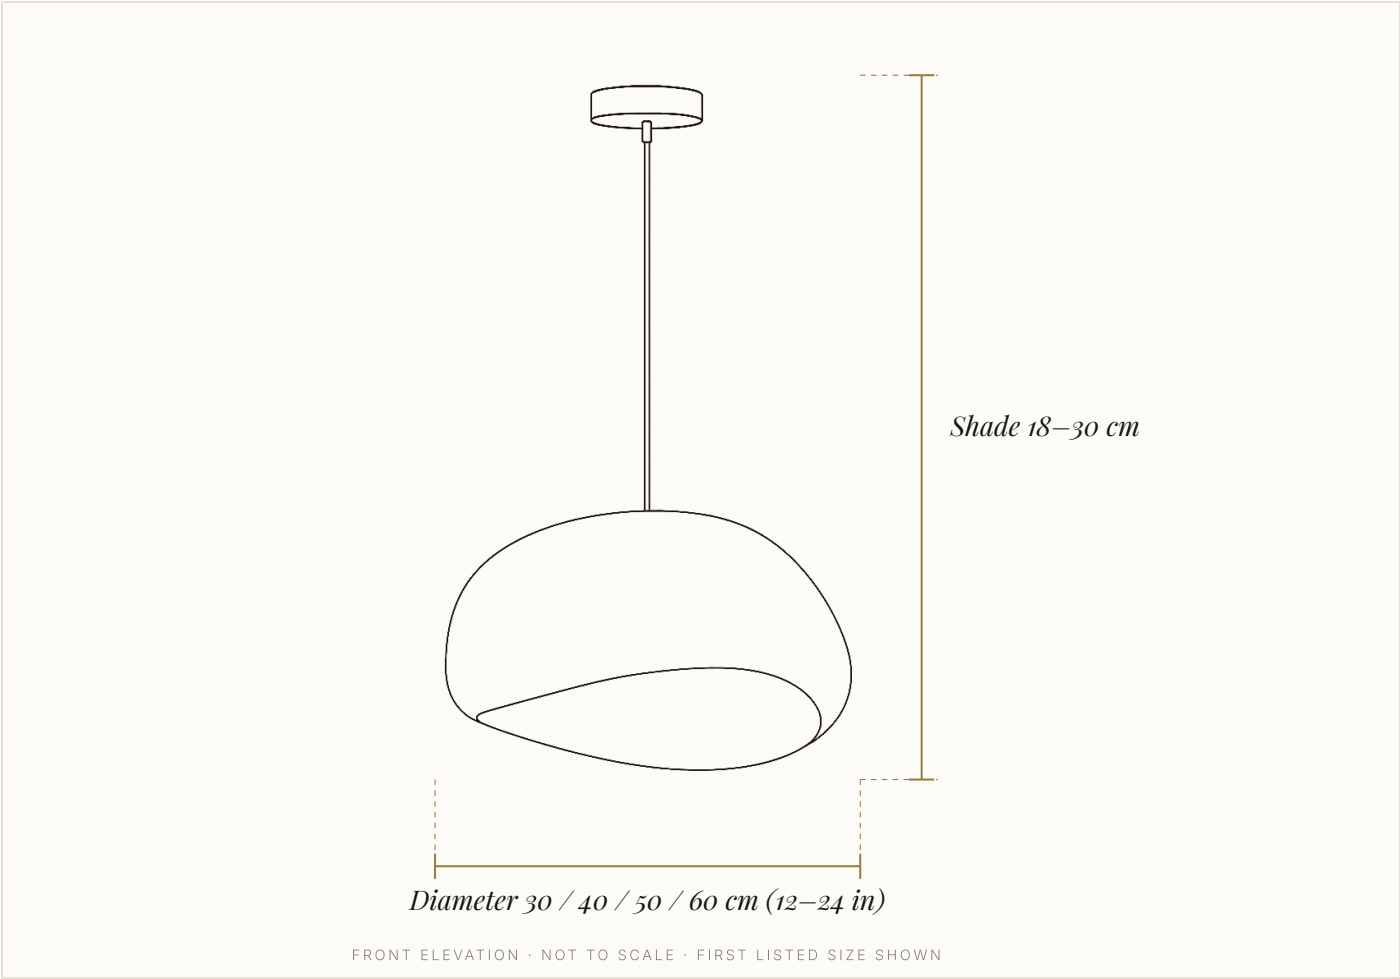

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Option 1	Diameter 30 / 40 / 50 / 60 cm (12–24 in)	Shade 18–30 cm
Option 2	Diameter 30 / 40 / 50 / 60 cm (12–24 in)	cord adjustable up to 150 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixο

FIXTURE
Saku · Pendant Lights

DRAWING NO.
TX-PD-87680-D1

VIEW
Front elevation

SCALE
Not to scale

UNITS
in / cm

ISSUED
7 Oct 2026

REVISION
A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Saku currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

BODY TYPE	SIZE	COLOR	CATALOGUE NO.
A-White	11.8 in (30 cm) Diameter	Cool White	TX-PD-87680-01
A-White	11.8 in (30 cm) Diameter	Warm White	TX-PD-87680-02
A-White	15.7 in (40 cm) Diameter	Cool White	TX-PD-87680-03
A-White	15.7 in (40 cm) Diameter	Warm White	TX-PD-87680-04
A-White	19.7 in (50 cm) Diameter	Cool White	TX-PD-87680-05
A-White	19.7 in (50 cm) Diameter	Warm White	TX-PD-87680-06
A-White	23.6 in (60 cm) Diameter	Cool White	TX-PD-87680-07
A-White	23.6 in (60 cm) Diameter	Warm White	TX-PD-87680-08
A-Grey	11.8 in (30 cm) Diameter	Cool White	TX-PD-87680-09
A-Grey	11.8 in (30 cm) Diameter	Warm White	TX-PD-87680-10
A-Grey	15.7 in (40 cm) Diameter	Cool White	TX-PD-87680-11
A-Grey	15.7 in (40 cm) Diameter	Warm White	TX-PD-87680-12
A-Grey	19.7 in (50 cm) Diameter	Cool White	TX-PD-87680-13
A-Grey	19.7 in (50 cm) Diameter	Warm White	TX-PD-87680-14
A-Grey	23.6 in (60 cm) Diameter	Cool White	TX-PD-87680-15
A-Grey	23.6 in (60 cm) Diameter	Warm White	TX-PD-87680-16
B-White	11.8 in (30 cm) Diameter	Cool White	TX-PD-87680-17
B-White	11.8 in (30 cm) Diameter	Warm White	TX-PD-87680-18
B-White	15.7 in (40 cm) Diameter	Cool White	TX-PD-87680-19
B-White	15.7 in (40 cm) Diameter	Warm White	TX-PD-87680-20
B-White	19.7 in (50 cm) Diameter	Cool White	TX-PD-87680-21
B-White	19.7 in (50 cm) Diameter	Warm White	TX-PD-87680-22
B-White	23.6 in (60 cm) Diameter	Cool White	TX-PD-87680-23
B-White	23.6 in (60 cm) Diameter	Warm White	TX-PD-87680-24
B-Grey	11.8 in (30 cm) Diameter	Cool White	TX-PD-87680-25
B-Grey	11.8 in (30 cm) Diameter	Warm White	TX-PD-87680-26
B-Grey	15.7 in (40 cm) Diameter	Cool White	TX-PD-87680-27
B-Grey	15.7 in (40 cm) Diameter	Warm White	TX-PD-87680-28
B-Grey	19.7 in (50 cm) Diameter	Cool White	TX-PD-87680-29
B-Grey	19.7 in (50 cm) Diameter	Warm White	TX-PD-87680-30
B-Grey	23.6 in (60 cm) Diameter	Cool White	TX-PD-87680-31
B-Grey	23.6 in (60 cm) Diameter	Warm White	TX-PD-87680-32

For your electrician

ELECTRICAL

LIGHT SOURCE	E27 socket, LED-compatible bulb (not included)
COLOR TEMPERATURE	Warm white (bulb-dependent)
INSTALLATION	Ceiling pendant

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

OVER A TABLE

Hang the bottom of the fixture 30–36 in (76–91 cm) above the tabletop; choose a width about one-half to two-thirds of the table.

OVER AN ISLAND

Space multiple pendants 24–30 in (61–76 cm) apart, 30–36 in above the counter.

OPEN AREAS

In halls and living spaces keep at least 84 in (7 ft / 213 cm) clear underneath; add about 3 in of drop per foot of ceiling above 8 ft.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiix.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.