

WALL SCONCES

Seren

Genuine alabaster disc wall sconce

Organic discs of real alabaster that glow warm through the stone, from a single accent to a nine-disc statement.



SPECIFICATIONS

PRODUCT TYPE	Wall Sconces
WIDTH	5.5 in / 14 cm (all sizes)
HEIGHT	18.1 in / 46 cm (5 discs) · 7.9 in (1) · 11.8 in (2) · 15.7 in (3) · 25.2 in (7) · 30.7 in (9)
EXTENSION FROM WALL	3.1 in / 8 cm from the wall
MATERIALS & FINISH	Genuine white alabaster on a gold metal backplate
LIGHT SOURCE	Integrated LED, about 7W–36W by size
COLOR TEMPERATURE	3000K warm white
DIMMING	Triac-dimmable version available
VOLTAGE	AC 110–240V
INSTALLATION	Hardwired wall mount, vertical or horizontal; licensed electrician recommended
DEPTH	3.1 in / 8 cm from the wall

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


SIZE	DIMMING
5 discs · 18.1 in, 1 disc · 5.5 × 7.9 in, 2 discs · 11.8 in, 3 discs · 15.7 in, 7 discs · 25.2 in, 9 discs · 30.7 in	Standard, Dimmable (Triac)

KEY FEATURES

- **Genuine alabaster.** real stone discs with natural veining; every piece is one of a kind
- **Slim 3.1 in profile** — sits close to the wall in hallways and bathrooms
- **Dimmable option.** choose the Triac-dimmable version for a dimmer switch
- **Six sizes.** 1, 2, 3, 5, 7 or 9 discs, from 5.5 in to 30.7 in in long
- **Integrated warm LED.** 3000K warm white, no bulbs to buy

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

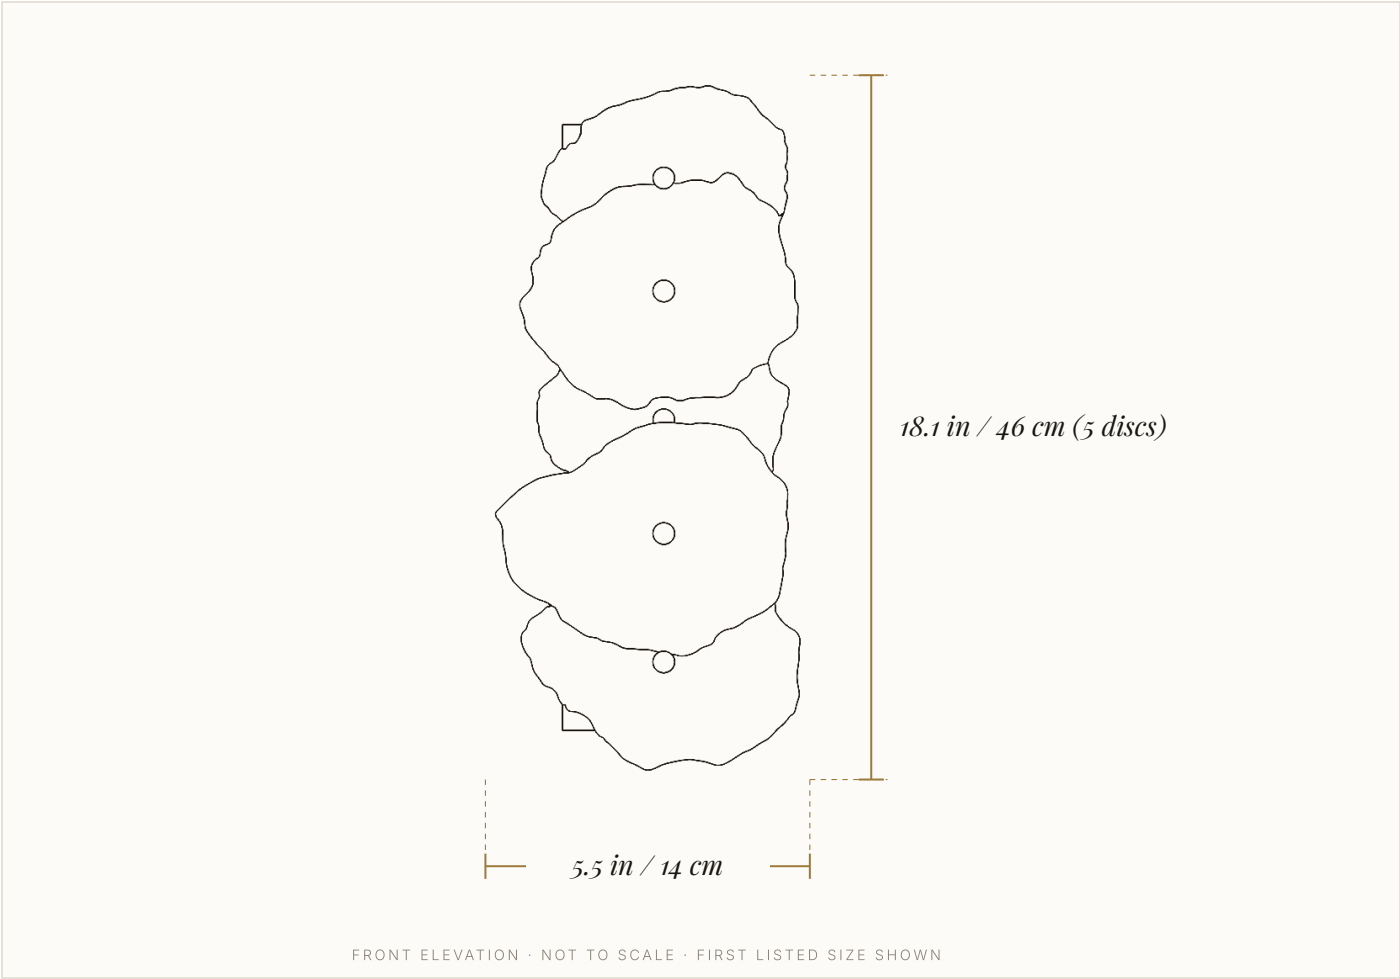

AVAILABLE SIZES			
SIZE	WIDTH	HEIGHT	EXTENSION FROM WALL
All sizes	5.5 in / 14 cm	18.1 in / 46 cm (5 discs)	3.1 in / 8 cm from the wall
1 disc · 5.5 × 7.9 in	5.5 in / 14 cm	7.9 in (1)	3.1 in / 8 cm from the wall
2 discs · 11.8 in	5.5 in / 14 cm	11.8 in (2)	3.1 in / 8 cm from the wall
3 discs · 15.7 in	5.5 in / 14 cm	15.7 in (3)	3.1 in / 8 cm from the wall
7 discs · 25.2 in	5.5 in / 14 cm	25.2 in (7)	3.1 in / 8 cm from the wall
9 discs · 30.7 in	5.5 in / 14 cm	30.7 in (9)	3.1 in / 8 cm from the wall

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Seren · Wall Sconces	
DRAWING NO. TX-WS-71840-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 13 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Seren currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	DIMMING	CATALOGUE NO.
5 discs · 18.1 in	Standard	TX-WS-71840-01
5 discs · 18.1 in	Dimmable (Triac)	TX-WS-71840-02
1 disc · 5.5 × 7.9 in	Standard	TX-WS-71840-03
1 disc · 5.5 × 7.9 in	Dimmable (Triac)	TX-WS-71840-04
2 discs · 11.8 in	Standard	TX-WS-71840-05
2 discs · 11.8 in	Dimmable (Triac)	TX-WS-71840-06
3 discs · 15.7 in	Standard	TX-WS-71840-07
3 discs · 15.7 in	Dimmable (Triac)	TX-WS-71840-08
7 discs · 25.2 in	Standard	TX-WS-71840-09
7 discs · 25.2 in	Dimmable (Triac)	TX-WS-71840-10
9 discs · 30.7 in	Standard	TX-WS-71840-11
9 discs · 30.7 in	Dimmable (Triac)	TX-WS-71840-12

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	AC 110–240V
LIGHT SOURCE	Integrated LED, about 7W–36W by size
COLOR TEMPERATURE	3000K warm white
DIMMING	Triac-dimmable version available
INSTALLATION	Hardwired wall mount, vertical or horizontal; licensed electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

MOUNTING HEIGHT

Centre of the fixture about 60–66 in (152–168 cm) from the finished floor, near eye level.

BESIDE A MIRROR OR BED

A pair set roughly 36–40 in (91–102 cm) apart; beside a bed, about 24–30 in (61–76 cm) above the mattress.

HALLWAYS

Space sconces every 8–10 ft (2.4–3 m) for an even wash of light.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?

Call or text (813) 790-7240 · support@tiix.com
9am – 5pm Eastern, seven days. We reply within 12 hours.

Returns. 30 days from delivery, no restocking fee.