

CEILING LIGHTS

Skyline

Ultra-thin linear LED ceiling light, black or white

A single seamless line of warm light that follows the ceiling — architecture, not a fixture.



SPECIFICATIONS

PRODUCT TYPE	Ceiling Lights
WIDTH	Lengths 13 / 20 / 26 / 33 ft (4 / 6 / 8 / 10 m)
MATERIALS & FINISH	Ultra-thin steel bar frame, PVC diffuser
LIGHT SOURCE	Integrated LED, 12W per metre
COLOR TEMPERATURE	Warm white, cool white, or dimmable (per option)
INSTALLATION	Hardwired 110–240V; rotatable base, ceiling or wall mount
IN THE BOX	Ships in one long carton sized to the length chosen
FINISH	black or white
POWER	hardwired, 110–240V

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

COLOR
Black, White

COLOR TEMPERATURE
Warm White, White, Dimmable


LENGTH
13 Ft, 20 Ft, 26 Ft, 33 Ft

KEY FEATURES

- **Ultra-thin minimalist bar.** a clean architectural line, not a bulky fixture.
- **Three light modes.** warm white, cool white, or dimmable (per option).
- **Even, efficient output** — 12W per metre for smooth, uniform illumination.
- **Rotatable base.** adjust the angle and direction of the light.
- **Four lengths.** sized to fit hallways, dining rooms and open living spaces.
- **Light.** integrated LED, 12W per metre

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

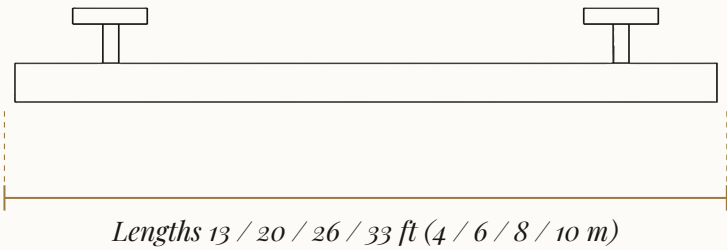

FRONT ELEVATION · NOT TO SCALE

AVAILABLE SIZES

SIZE	WIDTH
Standard	Lengths 13 / 20 / 26 / 33 ft (4 / 6 / 8 / 10 m)

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Skyline · Ceiling Lights	
DRAWING NO. TX-CL-01504-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Skyline currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

COLOR	COLOR TEMPERATURE	LENGTH	CATALOGUE NO.
Black	Warm White	13 Ft	TX-CL-01504-01
Black	Warm White	20 Ft	TX-CL-01504-02
Black	Warm White	26 Ft	TX-CL-01504-03
Black	Warm White	33 Ft	TX-CL-01504-04
Black	White	13 Ft	TX-CL-01504-05
Black	White	20 Ft	TX-CL-01504-06
Black	White	26 Ft	TX-CL-01504-07
Black	White	33 Ft	TX-CL-01504-08
Black	Dimmable	13 Ft	TX-CL-01504-09
Black	Dimmable	20 Ft	TX-CL-01504-10
Black	Dimmable	26 Ft	TX-CL-01504-11
Black	Dimmable	33 Ft	TX-CL-01504-12
White	Warm White	13 Ft	TX-CL-01504-13
White	Warm White	20 Ft	TX-CL-01504-14
White	Warm White	26 Ft	TX-CL-01504-15
White	Warm White	33 Ft	TX-CL-01504-16
White	White	13 Ft	TX-CL-01504-17
White	White	20 Ft	TX-CL-01504-18
White	White	26 Ft	TX-CL-01504-19
White	White	33 Ft	TX-CL-01504-20
White	Dimmable	13 Ft	TX-CL-01504-21
White	Dimmable	20 Ft	TX-CL-01504-22
White	Dimmable	26 Ft	TX-CL-01504-23
White	Dimmable	33 Ft	TX-CL-01504-24

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

PACKAGING

Ships in one long carton sized to the length chosen

For your electrician

ELECTRICAL

LIGHT SOURCE	Integrated LED, 12W per metre
POWER	hardwired, 110–240V
COLOR TEMPERATURE	Warm white, cool white, or dimmable (per option)
INSTALLATION	Hardwired 110–240V; rotatable base, ceiling or wall mount

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a ceiling junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the canopy, restore power and test. The LED is built in, so there are no bulbs to fit.

BEFORE YOU INSTALL

- ☐ A ceiling junction box rated for the fixture's weight
- ☐ Supply voltage confirmed for your region
- ☐ Ceiling height measured, so the fixture clears walkways
- ☐ A dimmer, if used, rated for the light source
- ☐ A second person or a stable ladder for lifting the fixture
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

ROOM SIZE
Add the room's length and width in feet; that number in inches is a good fixture diameter.

CLEARANCE
Keep at least 84 in (7 ft / 213 cm) from the floor to the bottom of the fixture in walkways.

OVER A TABLE
Choose a fixture about one-half to two-thirds of the table width; a flush or semi-flush mount suits ceilings under 8–9 ft.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiix.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.