

SOLAR LIGHTS

Ursa



SPECIFICATIONS

PRODUCT TYPE	Solar Lights
WIDTH	10 in (25 cm)
HEIGHT	15 in (38 cm)
MATERIALS & FINISH	Rust-resistant metal
LIGHT SOURCE	Solar LED, dusk-to-dawn
WEATHER RATING	Weather-resistant
INSTALLATION	Freestanding — place in sun


Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

KEY FEATURES

- **Solar-Powered Efficiency.** Harnesses natural sunlight to charge during the day, providing eco-friendly illumination without the need for wiring or...
- **Soft Ambient Light.** Emits a warm, inviting glow that enhances evening gatherings and highlights landscaping details beautifully.
- **Easy Installation.** Simply place the lamp in a sunny spot—no tools or complex setup required, making it ideal for any outdoor setting.
- **Elegant Waterfall Design.** Features a graceful watering can pouring water into a cascading fountain, adding a tranquil and sophisticated touch to...
- **Weather-Resistant Build.** Crafted to withstand rain, wind, and sun exposure, ensuring lasting durability and year-round outdoor use.
- **Energy-Saving Lighting.** Automatically turns on at dusk and off at dawn, optimizing battery life and minimizing maintenance.

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

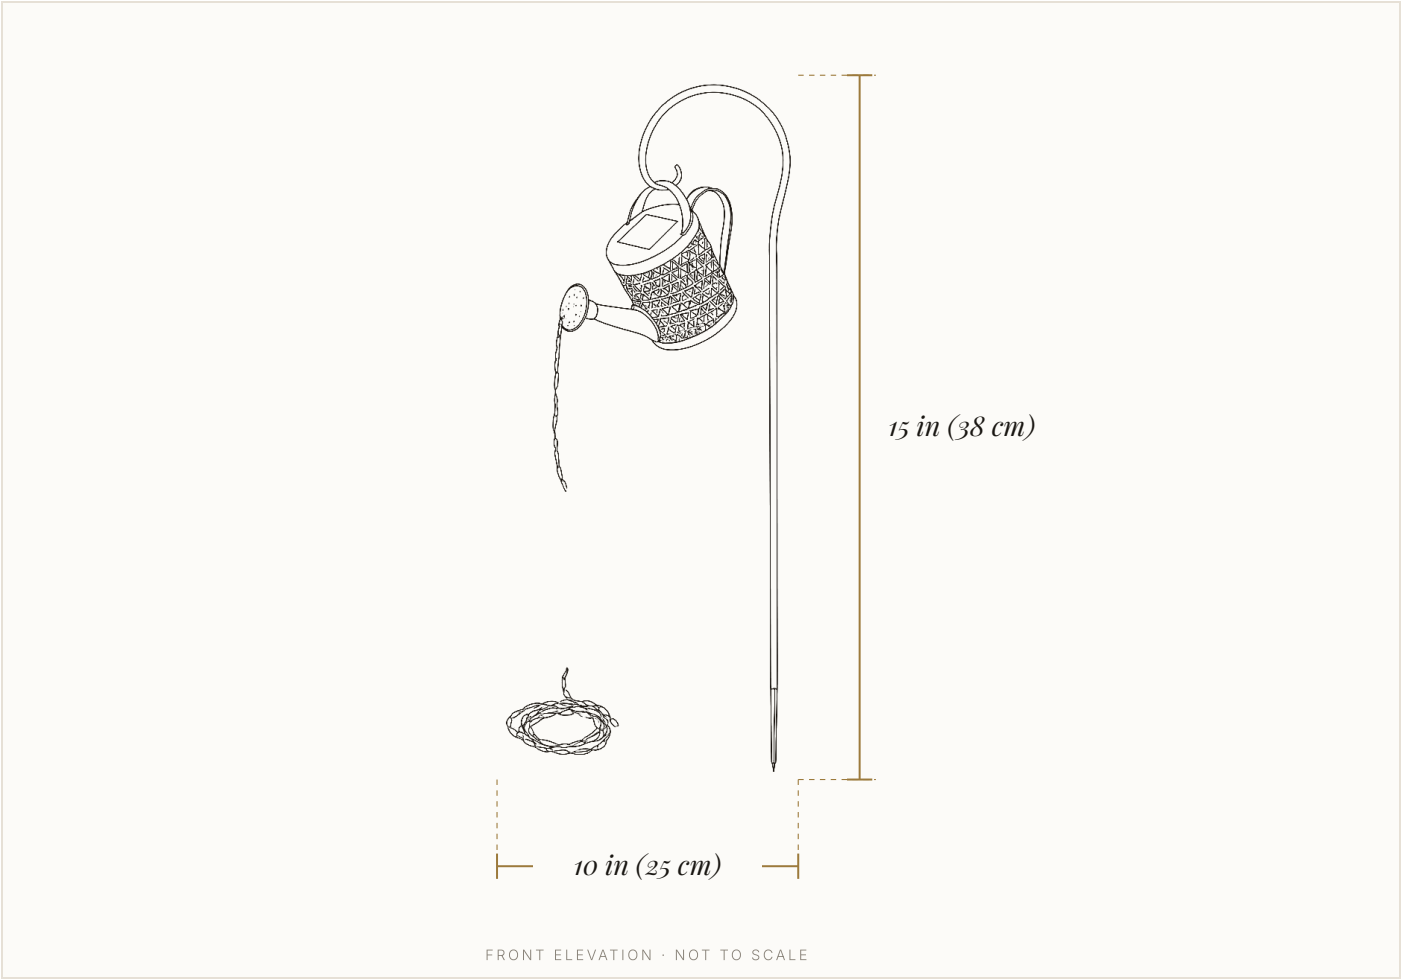

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Standard	10 in (25 cm)	15 in (38 cm)

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Ursa · Solar Lights	
DRAWING NO. TX-OL-81536-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Ursa currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

CONFIGURATION	CATALOGUE NO.
Standard	TX-OL-81536-01

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

Installation

ELECTRICAL

LIGHT SOURCE	Solar LED, dusk-to-dawn
RATING	Weather-resistant
INSTALLATION	Freestanding — place in sun

POWER

Solar fixture: no wiring. Site it where the panel gets direct sun for most of the day.

BEFORE YOU INSTALL

- ☐ A spot with direct sun for most of the day
- ☐ Fixings suitable for your wall type

PLACEMENT GUIDELINES

PLACEMENT
Choose a location sheltered or rated for the listed weather exposure.

SPACING
For even outdoor lighting, space fixtures every 6–10 ft (1.8–3 m).

WEATHER
Follow the IP rating listed above; keep connectors and cables protected.

Safety. Keep the panel clean and clear of shade for best performance.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.