

OUTDOOR WALL LIGHTING

Vega

Up-and-down LED wall light, matte black, IP65

Twin beams of warm light, up and down — mount a pair to frame a doorway, garage, or facade.



SPECIFICATIONS

PRODUCT TYPE	Outdoor Wall Lighting
WIDTH	Ø 2.7 in / 6.8 cm
HEIGHT	7.9 in / 20 cm
MATERIALS & FINISH	Die-cast aluminium, matte black
LIGHT SOURCE	Twin-beam LED, adjustable spread
COLOR TEMPERATURE	Warm white, approx. 3000K (cool-white and color options available)
BEAM	Adjustable up/down spread, single or triple beam
VOLTAGE	85–265 V, hardwired
WEATHER RATING	IP65
INSTALLATION	Hardwired wall mount, up/down beams
WARRANTY	1-year limited warranty
IN THE BOX	Approx. 20 × 12 × 12 cm per light


Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS

NUMBER OF LED BEAD	EACH HEADS BEAM
2-Light, 3-Light, 4-Light, 6-Light	1, 3
COLOR TEMPERATURE	
7 options, listed under Ordering information	

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

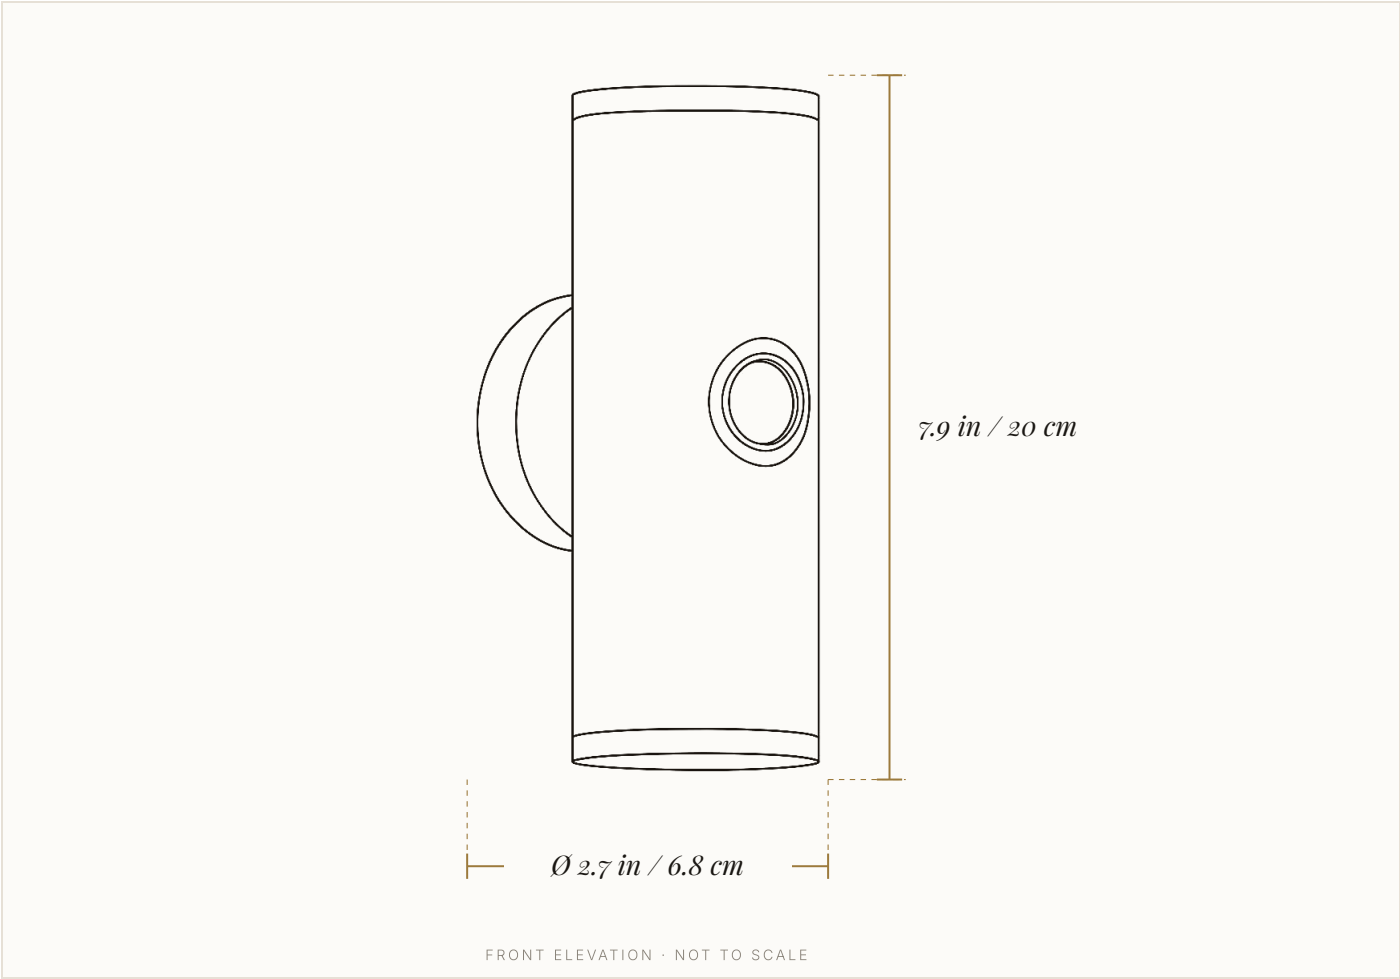

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT
Standard	Ø 2.7 in / 6.8 cm	7.9 in / 20 cm

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixo	
FIXTURE Vega · Outdoor Wall Lighting	
DRAWING NO. TX-OW-52448-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Vega currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

NUMBER OF LED BEAD	EACH HEADS BEAM	COLOR TEMPERATURE	CATALOGUE NO.
2-Light	1	Warm White	TX-OW-52448-01
2-Light	1	Cool White	TX-OW-52448-02
2-Light	1	Yellow	TX-OW-52448-03
2-Light	1	Red	TX-OW-52448-04
2-Light	1	Green	TX-OW-52448-05
2-Light	1	Blue	TX-OW-52448-06
2-Light	3	Warm White	TX-OW-52448-07
2-Light	3	Cool White	TX-OW-52448-08
2-Light	3	Colorful	TX-OW-52448-09
2-Light	3	Yellow	TX-OW-52448-10
2-Light	3	Red	TX-OW-52448-11
2-Light	3	Green	TX-OW-52448-12
2-Light	3	Blue	TX-OW-52448-13
3-Light	1	Warm White	TX-OW-52448-14
3-Light	1	Cool White	TX-OW-52448-15
3-Light	1	Yellow	TX-OW-52448-16
3-Light	1	Red	TX-OW-52448-17
3-Light	1	Green	TX-OW-52448-18
3-Light	1	Blue	TX-OW-52448-19
3-Light	3	Warm White	TX-OW-52448-20
3-Light	3	Cool White	TX-OW-52448-21
3-Light	3	Colorful	TX-OW-52448-22
3-Light	3	Yellow	TX-OW-52448-23
3-Light	3	Red	TX-OW-52448-24
3-Light	3	Green	TX-OW-52448-25
3-Light	3	Blue	TX-OW-52448-26
4-Light	1	Warm White	TX-OW-52448-27
4-Light	1	Cool White	TX-OW-52448-28
4-Light	1	Yellow	TX-OW-52448-29
4-Light	1	Red	TX-OW-52448-30
4-Light	1	Green	TX-OW-52448-31
4-Light	1	Blue	TX-OW-52448-32
4-Light	3	Warm White	TX-OW-52448-33
4-Light	3	Cool White	TX-OW-52448-34

NUMBER OF LED BEAD	EACH HEADS BEAM	COLOR TEMPERATURE	CATALOGUE NO.
4-Light	3	Colorful	TX-OW-52448-35
4-Light	3	Yellow	TX-OW-52448-36
4-Light	3	Red	TX-OW-52448-37
4-Light	3	Green	TX-OW-52448-38
4-Light	3	Blue	TX-OW-52448-39
6-Light	1	Warm White	TX-OW-52448-40
6-Light	1	Cool White	TX-OW-52448-41
6-Light	1	Yellow	TX-OW-52448-42
6-Light	1	Red	TX-OW-52448-43
6-Light	1	Green	TX-OW-52448-44
6-Light	1	Blue	TX-OW-52448-45
6-Light	3	Warm White	TX-OW-52448-46
6-Light	3	Cool White	TX-OW-52448-47
6-Light	3	Colorful	TX-OW-52448-48
6-Light	3	Yellow	TX-OW-52448-49
6-Light	3	Red	TX-OW-52448-50
6-Light	3	Green	TX-OW-52448-51
6-Light	3	Blue	TX-OW-52448-52

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	85–265 V, hardwired
LIGHT SOURCE	Twin-beam LED, adjustable spread
COLOR TEMPERATURE	Warm white, approx. 3000K (cool-white and color options available)
RATING	IP65
INSTALLATION	Hardwired wall mount, up/down beams

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR
Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING
Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER
Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.