

OUTDOOR WALL SCONCES

Outdoor Wall Sconce Carson, Industrial Glass Jar Lantern Light



SPECIFICATIONS

PRODUCT TYPE	Outdoor Wall Sconces
WIDTH	5.9 in (15 cm)
HEIGHT	17.7–18.1 in by finish
EXTENSION FROM WALL	8.2 in (21 cm)
MATERIALS & FINISH	Metal frame, clear glass jar
LIGHT SOURCE	E26/E27, max 60W, bulb not included
VOLTAGE	Maker-listed 220V — confirm local supply
WEATHER RATING	Outdoor rated — weather & rust resistant
INSTALLATION	Hardwired — electrician recommended
BULB	1 x E26/E27 base, max 60W, bulb not included

Dimensions are approximate (±0.4 in / 1 cm). Natural and hand-finished materials vary slightly from piece to piece.

OPTIONS


FINISH	SIZE
Rust	17.7"H x 5.9"W x 8.2"D

KEY FEATURES

- Clear glass jar shade that showcases a filament or warm white LED bulb
- **Two finishes.** weathered Rust or crisp matte Black
- Hardwired for a clean, permanent installation with no visible cord
- Rugged metal frame with authentic lantern styling
- Works as a porch light, entry light, garage light or garden wall accent
- **Voltage listed by the maker.** 220V. Please confirm compatibility with your local supply before installation

PROJECT	FIXTURE TYPE / TAG	LOCATION	QTY · APPROVED
---------	--------------------	----------	----------------

Dimensions

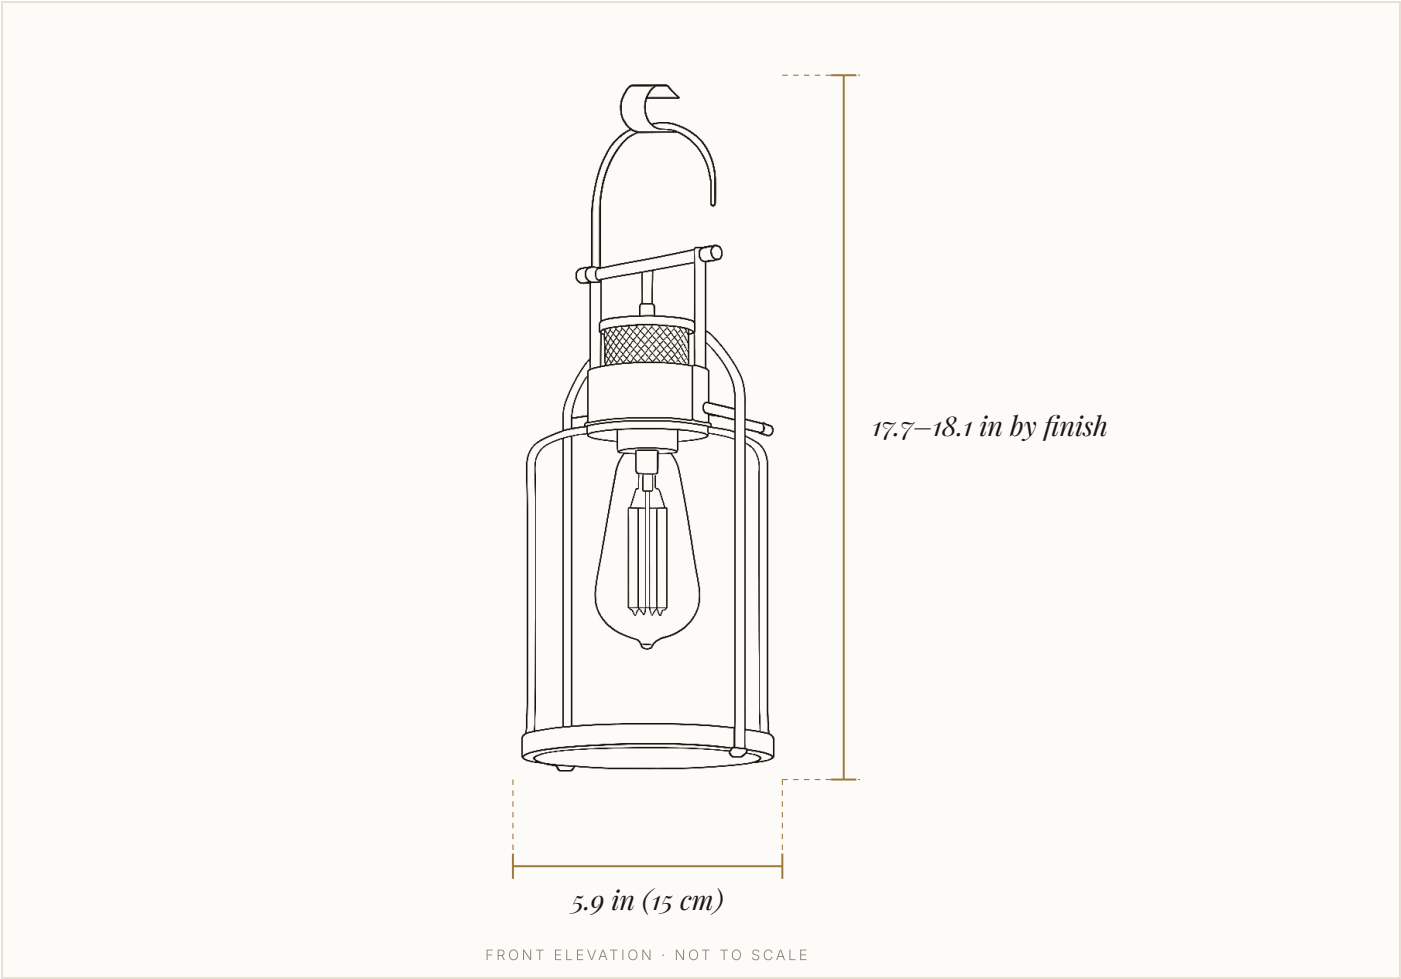

AVAILABLE SIZES

SIZE	WIDTH	HEIGHT	EXTENSION FROM WALL
17.7"H x 5.9"W x 8.2"D	5.9 in (15 cm)	17.7–18.1 in by finish	8.2 in (21 cm)

Overall dimensions of the fixture. Allow clearance around the fixture as described on page 4.

Tiixο

FIXTURE Outdoor Wall Sconce Carson, Industrial Glass Jar Lantern Light · Outdoor Wall Sconces	
DRAWING NO. TX-OW-55328-D1	VIEW Front elevation
SCALE Not to scale	UNITS in / cm
ISSUED 7 Oct 2026	REVISION A

Ordering information

Catalogue numbers are Tiixo reference numbers. Every configuration of Outdoor Wall Sconce Carson, Industrial Glass Jar Lantern Light currently offered, with its catalogue number. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

FINISH	SIZE	CATALOGUE NO.
Rust	17.7"H x 5.9"W x 8.2"D	TX-OW-55328-01

FROM THE PRODUCT LISTING

Carson measures about 5.9 in wide by 8.2 in deep. The Rust finish stands 17.7 in tall and the Black finish 18.1 in tall. For a front door, mount one sconce on the handle side, or a matching pair on both sides, with the center of the fixture roughly at eye level. On a garage or long wall, space multiple sconces evenly for a warm, rhythmic wash of light.

Carson hardwires to a standard exterior junction box. Professional installation is recommended. Wipe the glass and frame with a soft, dry cloth and avoid abrasive cleaners so the finish keeps its character.

CARE & MAINTENANCE

Switch off and let the fixture cool. Dust with a soft, dry cloth; no solvents or abrasive cleaners.

WARRANTY & RETURNS

Covered by the Tiixo limited warranty. Returns accepted within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged, send a photo within 7 days and we ship a replacement first.

For your electrician

ELECTRICAL

SUPPLY VOLTAGE	Maker-listed 220V — confirm local supply
LIGHT SOURCE	E26/E27, max 60W, bulb not included
RATING	Outdoor rated — weather & rust resistant
INSTALLATION	Hardwired — electrician recommended

WIRING (GENERAL GUIDANCE)

FIXTURE WIRE	CONNECT TO
● Black (or ribbed)	Line / hot
○ White (or smooth)	Neutral
● Green / bare copper	Ground

1. Turn power off at the breaker and confirm it is off with a non-contact tester.
2. Fix the mounting bracket to a recessed wall junction box rated for the fixture's weight, using the hardware supplied.
3. Make the connections above with approved connectors and fold the wires neatly into the box.
4. Fit the backplate, install bulbs within the rated wattage, restore power and test.

BEFORE YOU INSTALL

- ☐ A recessed wall junction box at the planned mounting height
- ☐ Supply voltage confirmed for your region
- ☐ Wall surface flat and able to carry the fixture's weight
- ☐ A dimmer, if used, rated for the light source
- ☐ Power off at the breaker before any work begins

PLACEMENT GUIDELINES

BESIDE A DOOR
Fixture about ¼–½ the height of the door; centre around 66 in (168 cm) above the threshold.

SPACING
Along a wall or path, space fixtures every 8–10 ft (2.4–3 m).

WEATHER
Mount to a weather-rated outdoor box and seal the backplate as your local code requires.

Safety. Turn off power at the breaker before installing. Installation must follow local electrical codes (the NEC in the US). We recommend a licensed electrician for every hardwired fixture. Never exceed the rated wattage.

Questions before or during install?
Call or text (813) 790-7240 · support@tiixo.com
9am – 5pm Eastern, seven days. We reply within 12 hours.
Returns. 30 days from delivery, no restocking fee.